




TVI TUBING SUPPORT SYSTEM

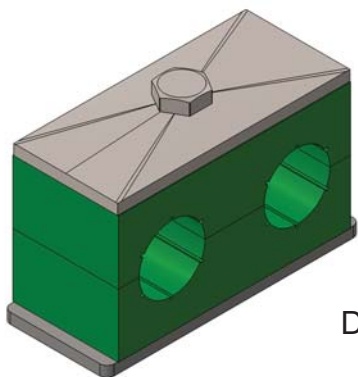



DUAL TUBE SUPPORTS

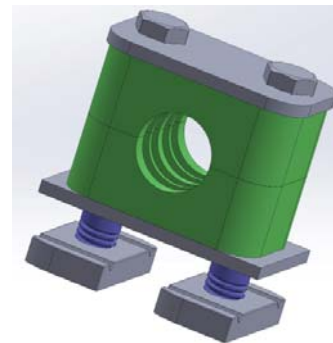


SINGLE TUBE SUPPORT

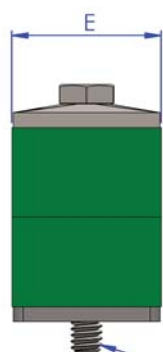

1/4-20 UNC

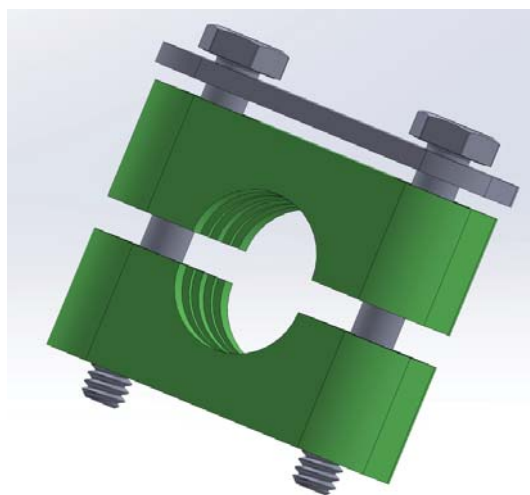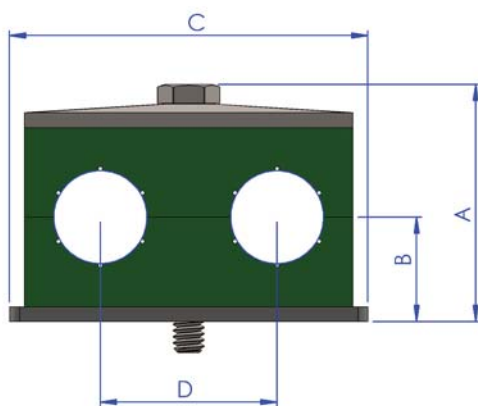

BASIC COMPONENT

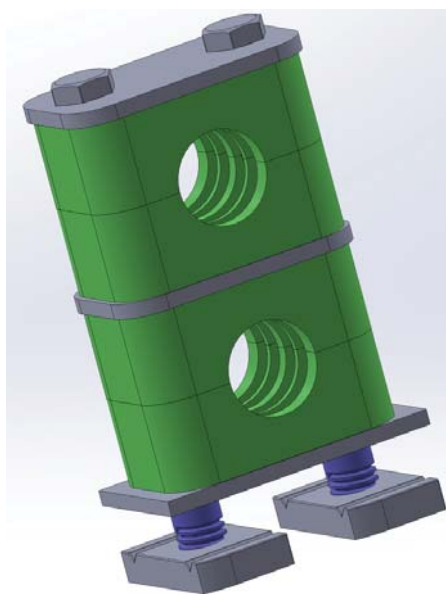

CAN BE STACKED (3) TALL




SINGLE TUBING SUPPORT CLAMP (units: inches)

P/N	DIA-A	B	C	D	E
TSC-106346G-4B	1/4"	1.42	1.89	1.18	1.02
TSC-106346G-6B	3/8"	1.42	1.89	1.18	1.02
TSC-106346G-8B	1/2"	1.42	1.89	1.18	1.02
TSC-106346G-12B	3/4"	1.82	2.20	1.18	1.30
TSC-106346G-16B	1.0"	1.82	2.20	1.18	1.30

Materials:

Metal Components: 304SS

Plastic Components: Polypropylene

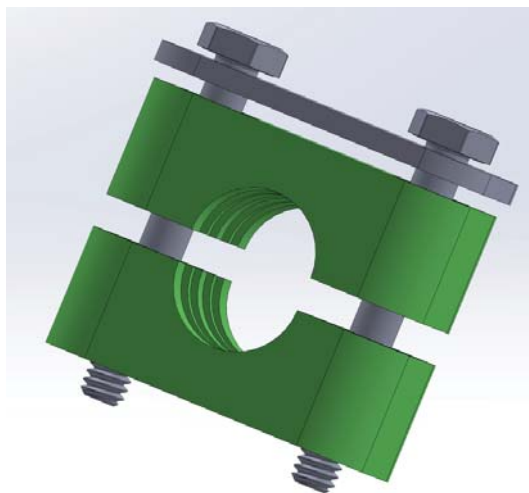

2 STACK TUBING SUPPORT CLAMP (units: inches)

P/N	DIA-A	B	C	D	E
TSC-106358G-4W	1/4"	2.68	1.89	1.18	1.02
TSC-106358G-6W	3/8"	2.68	1.89	1.18	1.02
TSC-106358G-8W	1/2"	2.68	1.89	1.18	1.02
TSC-106358G-12W	3/4"	3.30	2.20	1.18	1.30
TSC-106358G-16	1.0"	3.30	2.20	1.18	1.30

Tube Support Systems

Bolted Plastic Clamp Supports

TVI bolted plastic clamp supports offer versatility for mounting tubing and pipe. Three support kit configurations—single, twin, and single stacking—are available. See page 6.

Three mounting configurations—weld plate, mounting rail and rail nuts, and strut nuts—are available. See page 7.


Features

- Absorb shock and vibration
- Resist many chemicals and corrosives
- Reduce stress on system components
- Enhance system reliability
- Resist ultraviolet light
- Make system easily accessible for installation and maintenance.

Temperature Rating

-22 to 194°F (-30 to 90°C)

Texas Valve & Instruments, LLC
8221 Lockheed Ave
Houston, Tx 77061

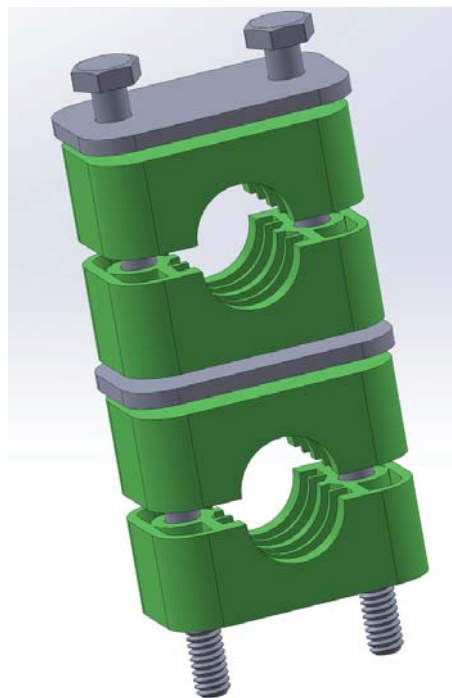


CAN BE STACKED (3) TALL


T: 713.645.2100
E: sales@tvi-i.com
Web: tvi-i.com

SINGLE TUBING SUPPORT CLAMP (units: inches)

P/N	DIA-A	B	C	D	E
TSC-106346G-4W	1/4"	1.42	1.89	1.18	1.02
TSC-106346G-6W	3/8"	1.42	1.89	1.18	1.02
TSC-106346G-8W	1/2"	1.42	1.89	1.18	1.02
TSC-106346G-12W	3/4"	1.82	2.20	1.18	1.30
TSC-106346G-16W	1.0"	1.82	2.20	1.18	1.30

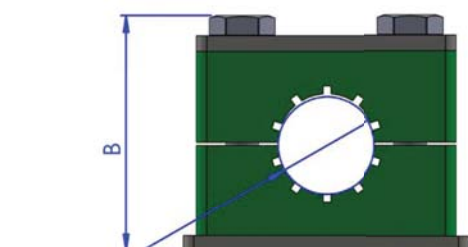Materials:**Metal Components:** 304SS**Plastic Components:** Polypropylene

WELD PAD MOUNT

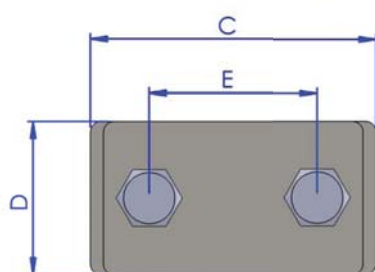

2 STACK TUBING SUPPORT CLAMP (units: inches)

P/N	DIA-A	B	C	D	E
TSC-106358G-4W	1/4"	2.68	1.89	1.18	1.02
TSC-106358G-6W	3/8"	2.68	1.89	1.18	1.02
TSC-106358G-8W	1/2"	2.68	1.89	1.18	1.02
TSC-106358G-12W	3/4"	3.30	2.20	1.18	1.30
TSC-106358G-16	1.0"	3.30	2.20	1.18	1.30

Tube Support Systems**Bolted Plastic Clamp Supports**

TVI bolted plastic clamp supports offer versatility for mounting tubing and pipe. Three support kit configurations—single, twin, and single stacking—are available. See page 6.

Three mounting configurations—weld plate, mounting rail and rail nuts, and strut nuts—are available. See page 7.

Features


- Absorb shock and vibration
- Resist many chemicals and corrosives
- Reduce stress on system components
- Enhance system reliability
- Resist ultraviolet light
- Make system easily accessible for installation and maintenance.

Temperature Rating

–22 to 194°F (–30 to 90°C)

Texas Valve & Instruments, LLC
8221 Lockheed Ave
Houston, Tx 77061


WELD PAD MOUNT

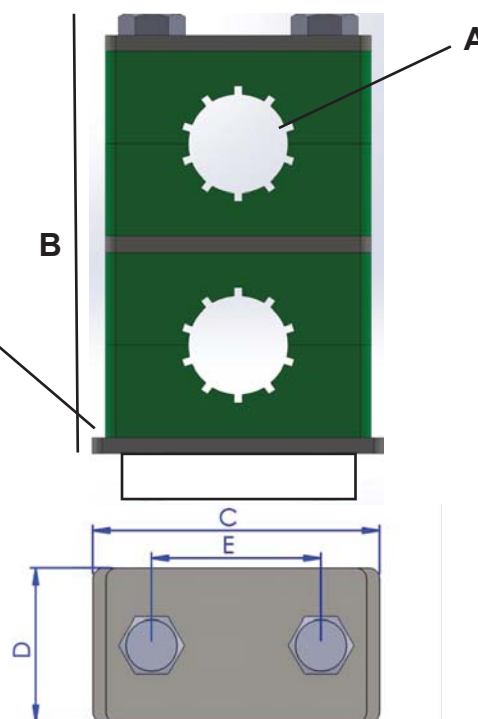

T: 713.645.2100
E: sales@tvi-i.com
Web: tvi-i.com

3 STACK TUBING SUPPORT CLAMP (units: inches)

P/N	DIA-A	B	C	D	E
TSC-106358G-4-3W	1/4"	4.08	1.89	1.18	1.02
TSC-106358G-6-3W	3/8"	4.08	1.89	1.18	1.02
TSC-106358G-8-3W	1/2"	4.08	1.89	1.18	1.02
TSC-106358G-12-3W	3/4"	4.70	2.20	1.18	1.30
TSC-106358G-16-3W	1.0"	4.70	2.20	1.18	1.30

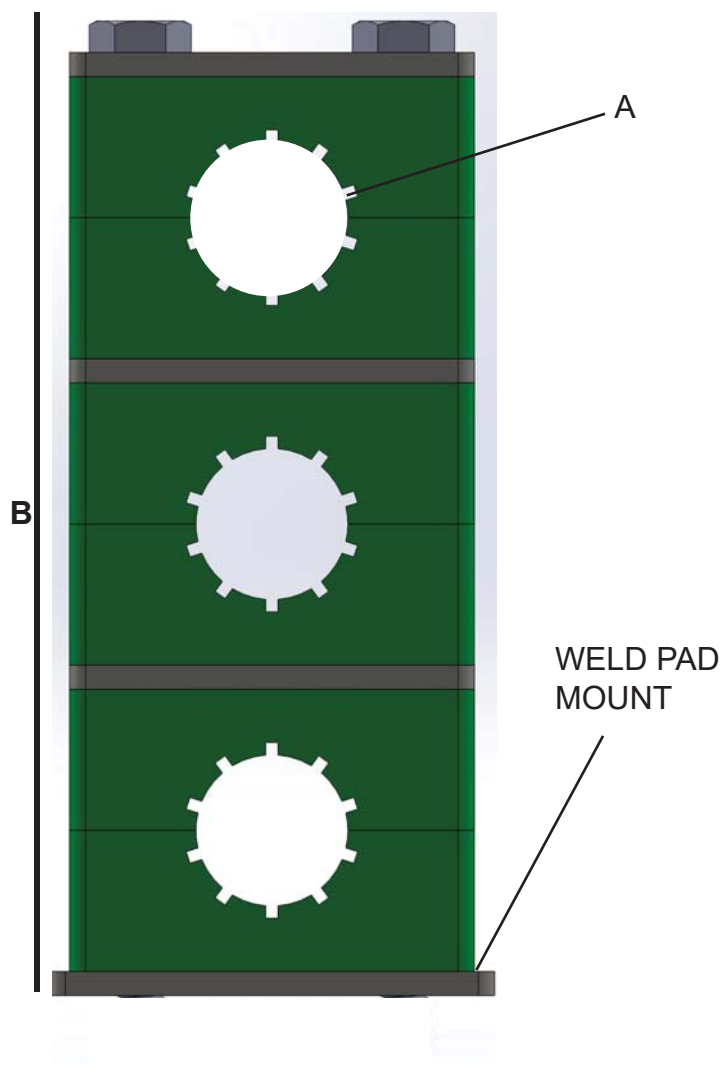

Tube Support Systems

Bolted Plastic Clamp Supports

TVI bolted plastic clamp supports offer versatility for mounting tubing and pipe. Three support kit configurations—single, twin, and single stacking—are available. See page 6.

Three mounting configurations—weld plate, mounting rail and rail nuts, and strut nuts—are available. See page 7.


Features

- Absorb shock and vibration
- Resist many chemicals and corrosives
- Reduce stress on system components
- Enhance system reliability
- Resist ultraviolet light
- Make system easily accessible for installation and maintenance.


Temperature Rating

–22 to 194°F (–30 to 90°C)

DUAL TUBING SUPPORT CLAMPS

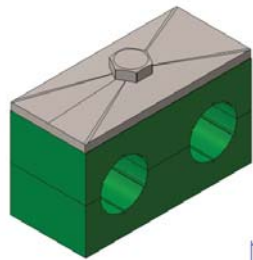

BASIC
MODEL

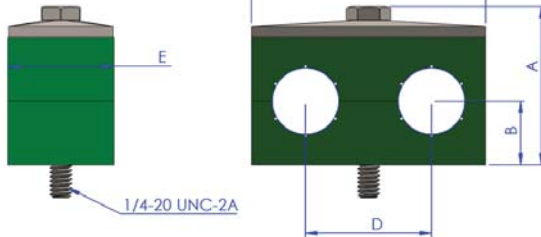

DUAL TUBING SUPPORT CLAMP (units: inches)					
P/N	A	B	C	D	E
TSC-106369G-4	1.50	.53	1.42	1.18	1.02
TSC-106369G-6	3/8"	.53	1.42	1.18	1.02
TSC-106369G-8	1/2"	.73	2.64	1.18	1.02
TSC-106369G-12	1.93	.73	2.64	1.18	1.30
TSC-106369G-16	1.0"	.73	2.64	1.18	1.30

Tube Support Systems

Bolted Plastic Clamp Supports

TVI bolted plastic clamp supports offer versatility for mounting tubing and pipe. Three support kit configurations—single, twin, and single stacking—are available. See page 6.


Three mounting configurations—weld plate, mounting rail and rail nuts, and strut nuts—are available. See page 7.

Features


- Absorb shock and vibration
- Resist many chemicals and corrosives
- Reduce stress on system components
- Enhance system reliability
- Resist ultraviolet light
- Make system easily accessible for installation and maintenance

Temperature Rating


-22 to 194°F (-30 to 90°C)




RAIL
MOUNT
MODEL

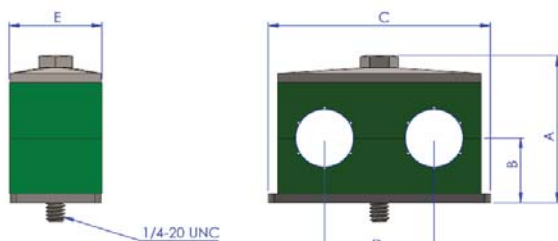

DUAL TUBING SUPPORT CLAMP (units: inches)					
P/N	A	B	C	D	E
TSC-106369G-4	1.50	.53	1.42	1.18	1.02
TSC-106369G-6	3/8"	.53	1.42	1.18	1.02
TSC-106369G-8	1/2"	.73	2.64	1.18	1.02
TSC-106369G-12	1.93	.73	2.64	1.18	1.30
TSC-106369G-16	1.0"	.73	2.64	1.18	1.30



WELD
PAD
MOUNT

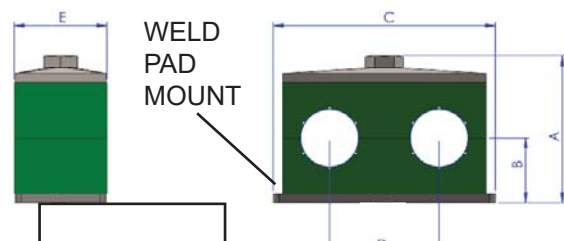


DUAL TUBING SUPPORT CLAMP (units: inches)					
P/N	A	B	C	D	E
TSC-106369G-4W	1.50	.53	1.42	1.18	1.02
TSC-106369G-6W	3/8"	.53	1.42	1.18	1.02
TSC-106369G-8W	1/2"	.73	2.64	1.18	1.02
TSC-106369G-12W	1.93	.73	2.64	1.18	1.30
TSC-106369G-16	1.0"	.73	2.64	1.18	1.30

TVI TUBING SUPPORT SYSTEM


1 STACK TUBING SUPPORT CLAMP (units: inches)

P/N	DIA-A	B	C	D	E
TSC-106346G-4	1/4"	1.42	1.89	1.18	1.02
TSC-106346G-6	3/8"	1.42	1.89	1.18	1.02
TSC-106346G-8	1/2"	1.42	1.89	1.18	1.02
TSC-106346G-12	3/4"	1.82	2.20	1.18	1.30
TSC-106346G-16	1.0"	1.82	2.20	1.18	1.30

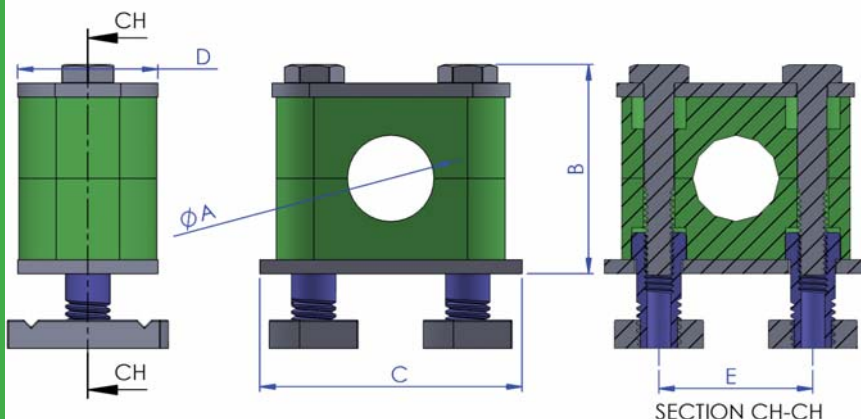

2 STACK TUBING SUPPORT CLAMP (units: inches)

P/N	DIA-A	B	C	D	E
TSC-106358G-4	1/4"	2.68	1.89	1.18	1.02
TSC-106358G-6	3/8"	2.68	1.89	1.18	1.02
TSC-106358G-8	1/2"	2.68	1.89	1.18	1.02
TSC-106358G-12	3/4"	3.30	2.20	1.18	1.30
TSC-106358G-16	1.0"	3.30	2.20	1.18	1.30

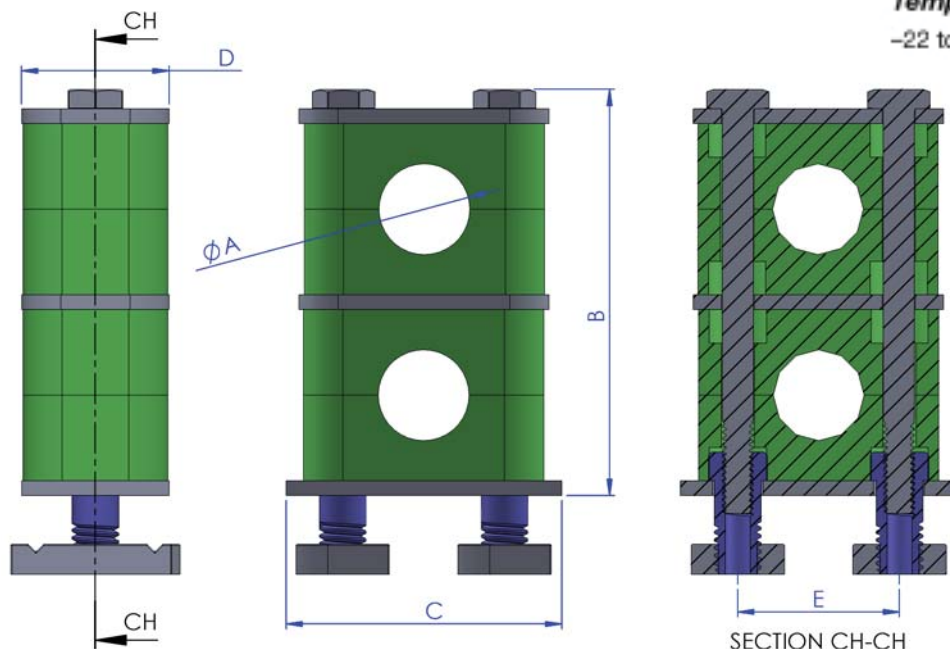

RAIL MOUNTING WITH STUDS & NUTS

Materials:

Metal Components: 304 SS

Plastic Components: Polypropylene

Tube Support Systems

Bolted Plastic Clamp Supports

TVI bolted plastic clamp supports offer versatility for mounting tubing and pipe. Three support kit configurations—single, twin, and single stacking—are available. See page 6.

Three mounting configurations—weld plate, mounting rail and rail nuts, and strut nuts—are available. See page 7.

Features

- Absorb shock and vibration
- Resist many chemicals and corrosives
- Reduce stress on system components
- Enhance system reliability
- Resist ultraviolet light
- Make system easily accessible for installation and maintenance

Temperature Rating


-22 to 194°F (-30 to 90°C)

TVI TUBING SUPPORT SYSTEM

RAIL MOUNTING WITH STUDS & NUTS

3 STACK TUBING SUPPORT CLAMP (units: inches)

P/N	DIA-A	B	C	D	E
TSC-106358G-4-3	1/4"	4.08	1.89	1.18	1.02
TSC-106358G-6-3	3/8"	4.08	1.89	1.18	1.02
TSC-106358G-8-3	1/2"	4.08	1.89	1.18	1.02
TSC-106358G-12-3	3/4"	4.70	2.20	1.18	1.30
TSC-106358G-16-3	1.0"	4.70	2.20	1.18	1.30

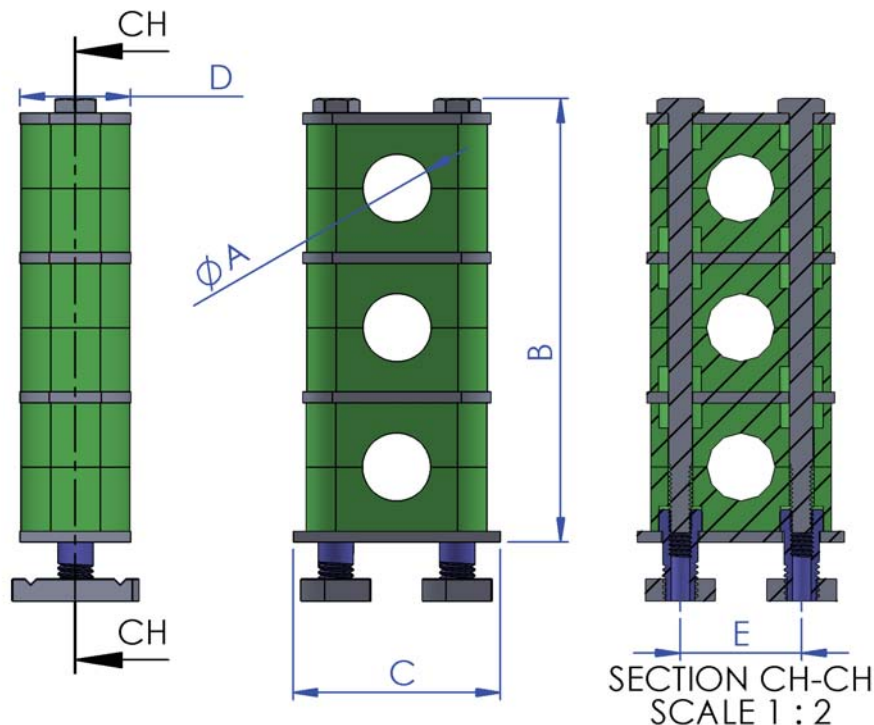

Tube Support Systems

Bolted Plastic Clamp Supports

TVI bolted plastic clamp supports offer versatility for mounting tubing and pipe. Three support kit configurations—single, twin, and single stacking—are available. See page 6.

Three mounting configurations—weld plate, mounting rail and rail nuts, and strut nuts—are available. See page 7.

Features

- Absorb shock and vibration
- Resist many chemicals and corrosives
- Reduce stress on system components
- Enhance system reliability
- Resist ultraviolet light
- Make system easily accessible for installation and maintenance.


Temperature Rating

–22 to 194°F (–30 to 90°C)

TVI TUBING SUPPORT SYSTEM


2 STACK TUBING SUPPORT CLAMP (units: inches)

P/N	DIA-A	B	C	D	E
TSC-106346G-A-4	1/4"	1.42	1.89	1.18	1.02
TSC-106346G-A-6	3/8"	1.42	1.89	1.18	1.02
TSC-106346G-A-8	1/2"	1.42	1.89	1.18	1.02
TSC-106346G-A-12	3/4"	1.82	2.20	1.18	1.30
TSC-106346G-A-16	1.0"	1.82	2.20	1.18	1.30

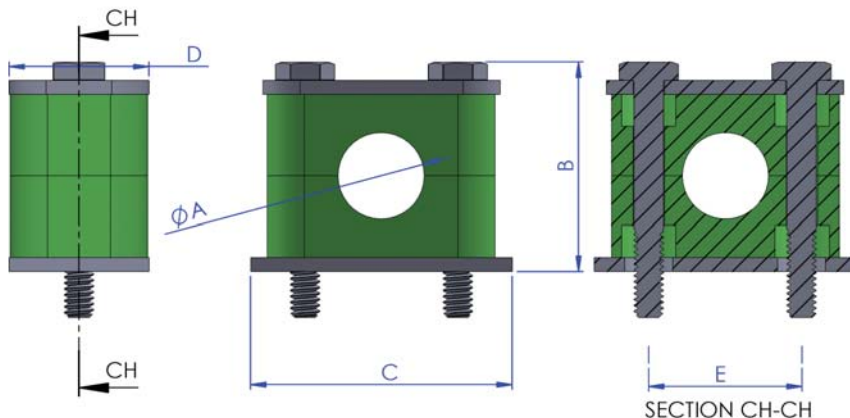

2 STACK TUBING SUPPORT CLAMP (units: inches)

P/N	DIA-A	B	C	D	E
TSC-106358G-A-4	1/4"	2.68	1.89	1.18	1.02
TSC-106358G-A-6	3/8"	2.68	1.89	1.18	1.02
TSC-106358G-A-8	1/2"	2.68	1.89	1.18	1.02
TSC-106358G-A-12	3/4"	3.30	2.20	1.18	1.30
TSC-106358G-A-16	1.0"	3.30	2.20	1.18	1.30

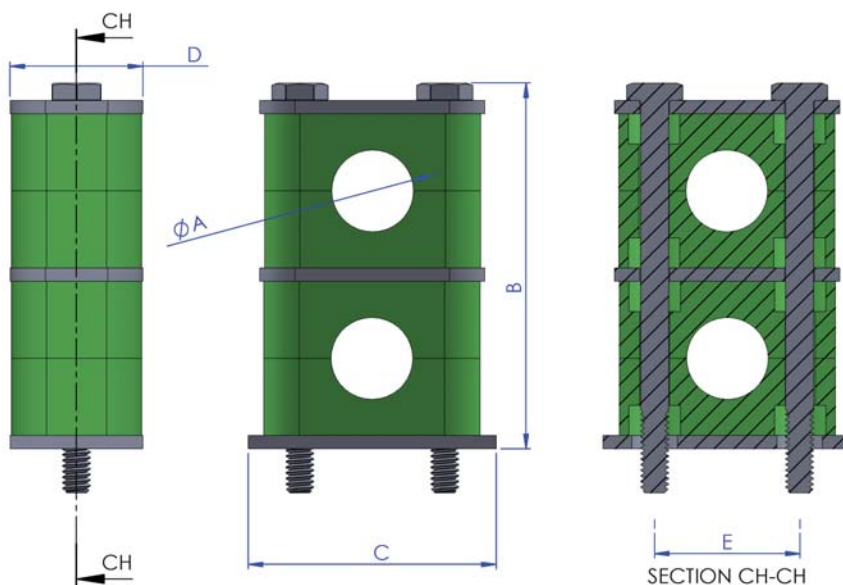

RAIL MOUNTING - NO STUDS & NUTS

Materials:

Metal Components: 304 SS

Plastic Components: Polypropylene

Tube Support Systems

Bolted Plastic Clamp Supports

TVI bolted plastic clamp supports offer versatility for mounting tubing and pipe. Three support kit configurations—single, twin, and single stacking—are available. See page 6.

Three mounting configurations—weld plate, mounting rail and rail nuts, and strut nuts—are available. See page 7.

Features

- Absorb shock and vibration
- Resist many chemicals and corrosives
- Reduce stress on system components
- Enhance system reliability
- Resist ultraviolet light
- Make system easily accessible for installation and maintenance

Temperature Rating


-22 to 194°F (-30 to 90°C)

TVI TUBING SUPPORT SYSTEM

3 STACK TUBING SUPPORT CLAMP (units: inches)

P/N	DIA-A	B	C	D	E
TSC-106358G-A-4-3	1/4"	4.08	1.89	1.18	1.02
TSC-106358G-A-6-3	3/8"	4.08	1.89	1.18	1.02
TSC-106358G-A-8-3	1/2"	4.08	1.89	1.18	1.02
TSC-106358G-A-12-3	3/4"	4.70	2.20	1.18	1.30
TSC-106358G-A-16-3	1.0"	4.70	2.20	1.18	1.30

RAIL MOUNTING - NO STUDS & NUTS

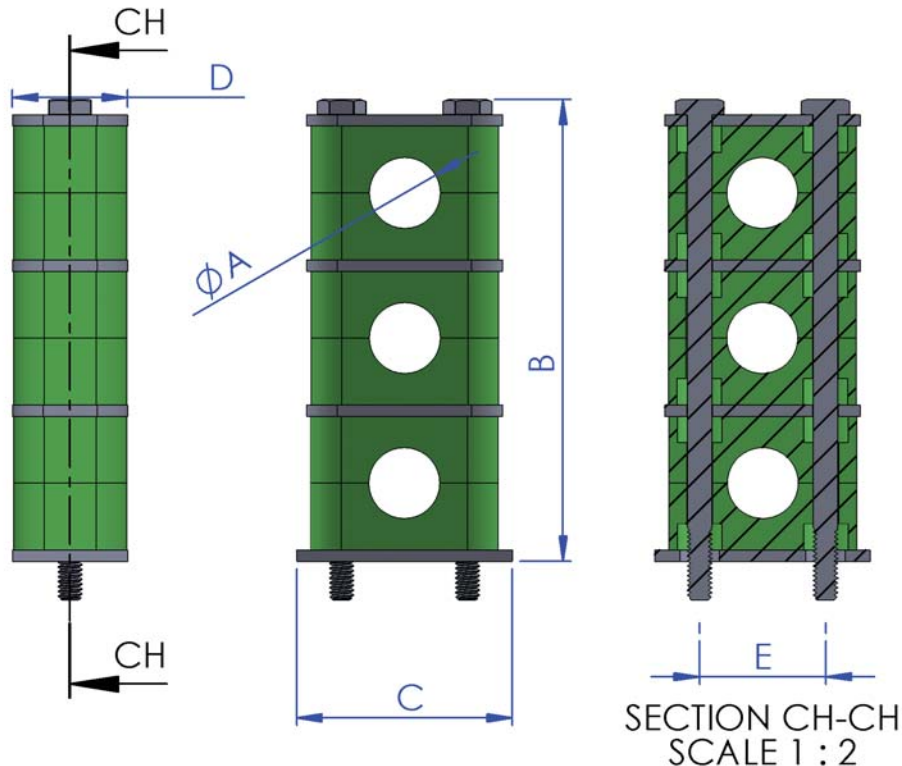

Tube Support Systems

Bolted Plastic Clamp Supports

TVI bolted plastic clamp supports offer versatility for mounting tubing and pipe. Three support kit configurations—single, twin, and single stacking—are available. See page 6.

Three mounting configurations—weld plate, mounting rail and rail nuts, and strut nuts—are available. See page 7.


Features

- Absorb shock and vibration
- Resist many chemicals and corrosives
- Reduce stress on system components
- Enhance system reliability
- Resist ultraviolet light
- Make system easily accessible for installation and maintenance.

Temperature Rating

-22 to 194°F (-30 to 90°C)

TUBING STRUT	
P/N	LENGTH - A
106355G-4	4.0"
106355G-8	8.0"
106356G-12	12.0"

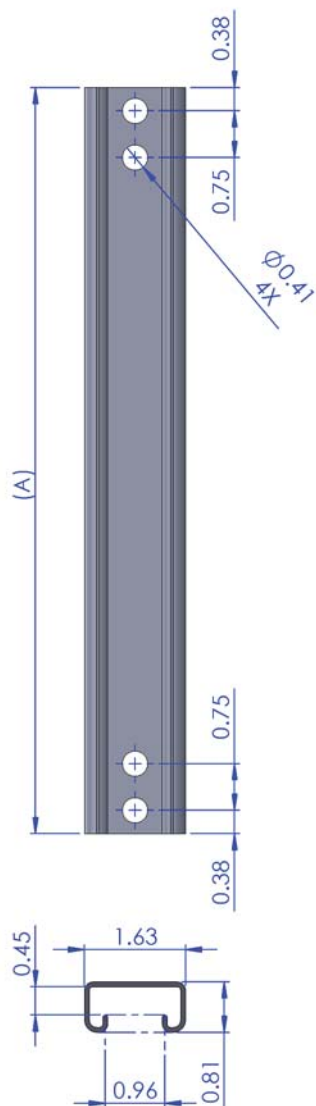

STANDARD MATERIAL: 304SS
 OPTIONAL: 316SS

RAIL NUTS

P/N	THREAD
TSC-106356G-4	1/4"-20 UNC
TSC-106356G-6	3/8-18 UNC

TUBING STRUT	
P/N	LENGTH - A
TSC-106355G-4	4.0"
TSC-106355G-8	8.0"
TSC-106355G-12	12"

OTHER LENGTHS
 AVAILABLE

Texas Valve & Instruments, LLC
 8221 Lockheed Ave
 Houston, Tx 77061

T: 713.645.2100
 E: sales@tvi-i.com
 Web: tvi-i.com