

TVI


Texas Valve & Instruments, LLC

Samples Cylinders & Accessories

SULFINERT COATING AVAILABLE




DOT 3E Sample Cylinders

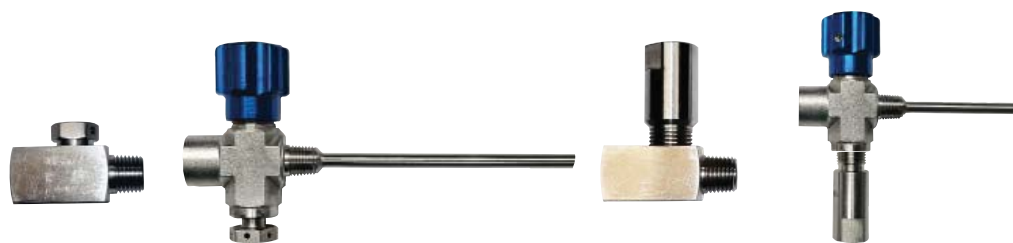

Rupture Discs and
Rupture Disc Valves

Relief Valves and
Relief Valve/Mini Valve
Combo

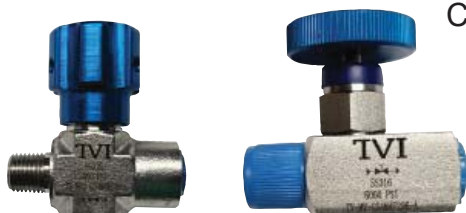

Premium Mini Valves with PEEK® Seats

Constant Pressure
Cylinders

DOT-3E SAMPLE CYLINDERS

CYLINDER VALVES

MINI VALVES

NON ROTATING STEM VALVES

OUTAGE TUBES

PRESSURE RELIEF DEVICES

CONSTANT PRESSURE CYLINDERS

QUICK CONNECTS

ACCESSORIES

For more information about the complete line of products and services by TVI, visit our web site or contact the sales representative nearest you.

www.TVI-I.com

Texas Valve & Instruments, LLC
8221 Lockheed Ave
Houston, TX 77061

T 713.645.2100

F 713.645.2102

E Sales@TVI-I.com

It is entirely the responsibility of the user of the equipment (detector tube and pump) to see that the equipment is operated, maintained, and repaired in strict accordance with the manufacturer's instructions provided with the equipment. It is also the sole responsibility of the user to ensure that the tubes are not used beyond their expiration date. The manufacturer and the manufacturer's distributors are not otherwise liable for any incorrect measurement and its consequences or any damages resulting from the user's negligence or otherwise.

SULFINERT COATING AVAILABLE

Characteristics

- Internal neck formed for easy cleaning
- Heavy wall neck to prevent splitting and flaring

Features

- Body made of seamless stainless steel tubing
- Aircraft quality NPT threads
- Sizes range from 40 to 500 cc
- Working pressures to 1,800 psig
- 316L stainless steel-standard
- Monel 400, Hastelloy C-276 available


Specifications

- Manufactured to DOT requirements 49 CFR Part 178
- All DOT-3E cylinders are hydrostatically test to 5/3x working pressure. Certificates of testing data are available for a nominal fee.
- One cylinder of each lot or one of every 500 cylinders is burst tested, which ever is the smaller number.
- DOT-3E

Pressure & Temperature Ratings


Temperature (°F)	Working Pressure
-65 to 100	1800
200	1360
300	1230
400	1130
500	1050
600	1000
700	970
800	930

Cylinder Assembly
with Outage Tube,
Rupture Disc Assembly
and Sample Valves

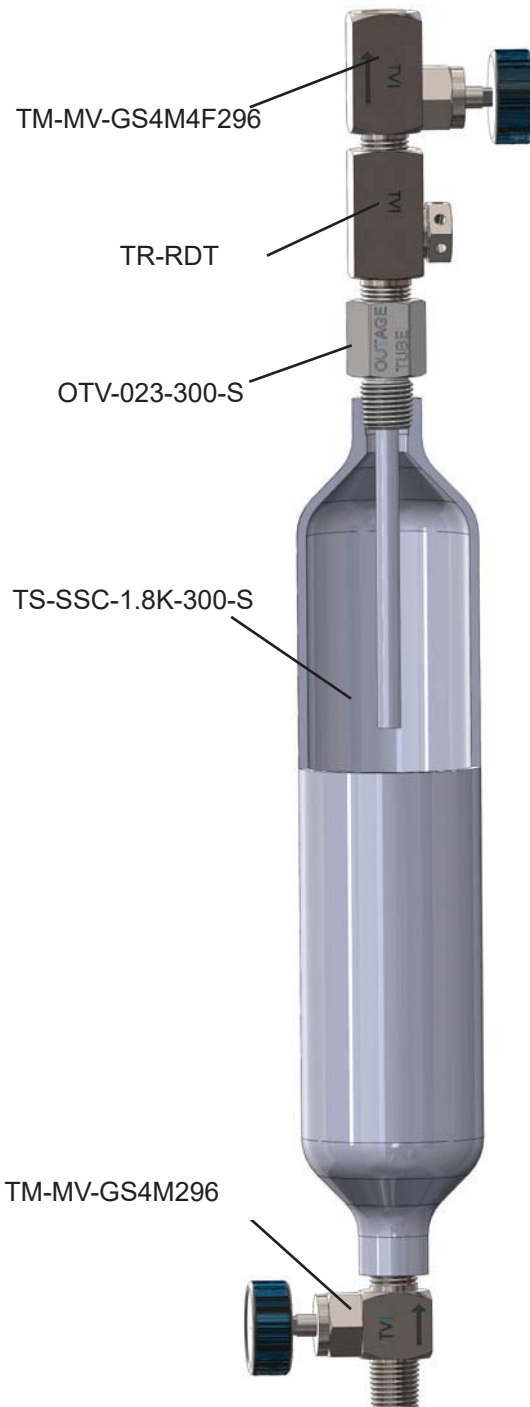

Sampling Systems

Sample Cylinders

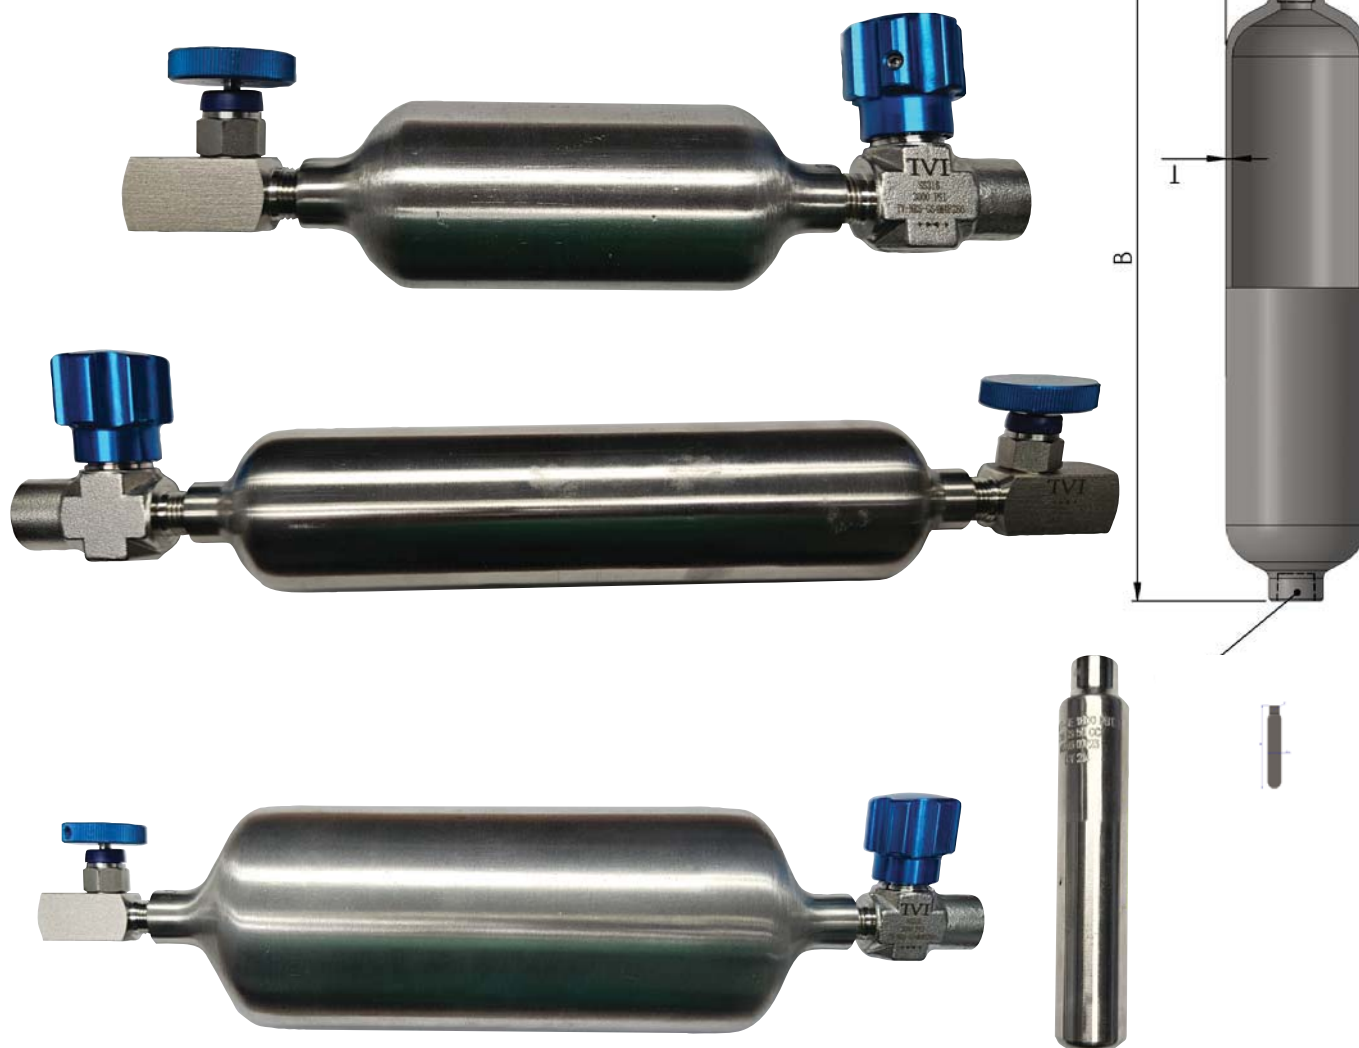

SULFINERT COATING AVAILABLE

P/N: TS-SSCA-1.8K-50-S

Cylinder Dimensions

Part No.	Specification	Internal Volume (cc ± 5%)	Dimensions (Inches)			NPT Thread P	Pressure Rating	Weight (lb)
			A	B	T			
TS-SSC-1.8K-40-S	DOT-3E	50	1.50	3.75	0.070	1/8	1,800 PSI	0.4
TS-SSC-1.8K-50-S	DOT-3E	50	1.50	3.75	0.093	1/4		0.4
TS-SSCA-1.8K-50-S	DOT-3E	50	1.00	6.06	0.065	1/4		0.4
TS-SSC-1.8K-75-S	DOT-3E	75	1.50	4.94	0.093	1/4		0.5
TS-SSC-1.8K-150-S	DOT-3E	150	1.98	6.00	0.093	1/4		1
TS-SSC-1.8K-300-S*	DOT-3E	300	1.98	10.00	0.093	1/4		1.7
TS-SSC-1.8K-400-S	DOT-3E	400	1.98	12.00	0.093	1/4		2.3
TS-SSC-1.8K-500-S*	DOT-3E	500	1.98	14.50	0.093	1/4		2.7
TS-SSC-1.8K-1000-S	DOT-SP-16195	1000	3.56	11.00	0.206	1/4		5.8
TS-SSCA-1.8K-1000-S	DOT-SP-16195	1000	3.56	11.00	0.206	1/2		5.8
TS-SSC-1.8K-2250-S		2250	4.00	17.00	0.093	1/4		11.2
TS-SSC-1.8K-3785-S		1 Gal (3785cc)	4.00	26.50	0.209	1/4		16

**Replace the S with an M for Monel 400*

Sulfinert® Sample Cylinders

TVI stocks 300, 500, & 1000 cc Sizes

Refinery and natural gas samples often contain trace amounts of sulfur-containing compounds which can interfere with reactions or poison catalysts in petrochemical processes. Because sulfur compounds quickly react with stainless steel surfaces, accurate determination of these compounds is impossible when samples are collected and stored in untreated sample cylinders. Sulfinert® passivation technique bonds an inert silica layer into the surface of stainless steel, preventing active compounds from reacting with or adsorbing to the steel. These high pressure sample cylinders are Sulfinert® treated for greater stability of sulfur compounds and mercury. DOT 3E & SP cylinders allow sampling at gas wellheads as well as in the refinery.

Cylinder Dimensions:



Part No.	Specification	Internal Volume (cc ± 5%)	Dimensions (Inches)			NPT Thread P	Pressure Rating	Weight (lb)
			A	B	T			
TS-SSC-1.8K-40-S-S	DOT-3E	50	1.50	3.75	0.070	1/8	1,800 PSI	0.4
TS-SSC-1.8K-50-S-S	DOT-3E	50	1.50	3.75	0.093	1/4		0.4
TS-SSC-1.8K-75-S-S	DOT-3E	75	1.50	4.94	0.093	1/4		0.5
TS-SSC-1.8K-150-S-S	DOT-3E	150	1.98	6.00	0.093	1/4		1
TS-SSC-1.8K-300-S-S	DOT-3E	300	1.98	10.00	0.093	1/4		1.8
TS-SSC-1.8K-400-S-S	DOT-3E	400	1.98	12.00	0.093	1/4		2.3
TS-SSC-1.8K-500-S-S	DOT-3E	500	1.98	14.50	0.093	1/4		2.7
TS-SSC-1.8K-1000-S-S	DOT-SP-16195	1000	3.56	5.80	0.206	1/4		5.8
TS-SSC-1.8K-2250-S-S		2250	4.00	17.00	0.093	1/4		11.2
TS-SSC-1.8K-3785-S-S		1 Gal (3785cc)	4.00	26.50	0.209	1/4		16


Sulfinert® Mini Sampling Valves

TVI stocks all configurations

Refinery and natural gas samples often contain trace amounts of sulfur-containing compounds which can interfere with reactions or poison catalysts in petrochemical processes. Because sulfur compounds quickly react with stainless steel surfaces, accurate determination of these compounds is impossible when samples are collected and stored in untreated sample cylinders. Sulfinert® passivation technique bonds an inert silica layer into the surface of stainless steel, preventing active compounds from reacting with or adsorbing to the steel.



1/4" MALE X FEMALE

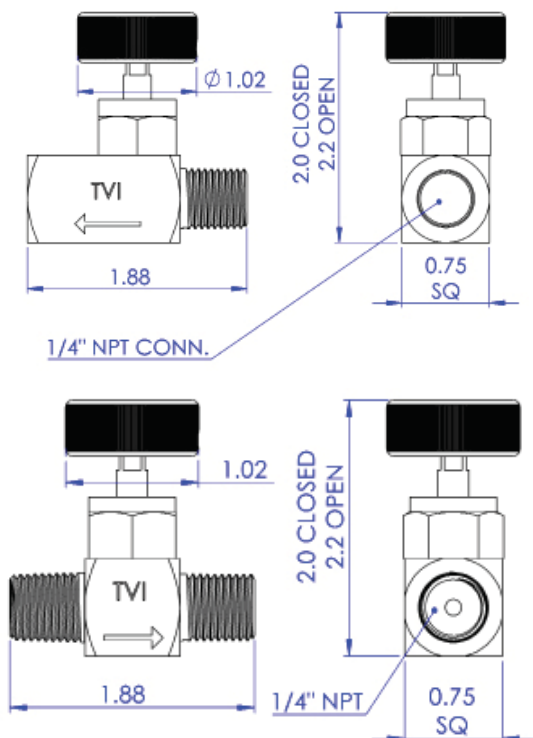

1/4" MALE X MALE

Part Number	316 SS	C.S.	Configuration
TV-MV-GS4M4F296-S	X		1/4" Male x 1/4" Female
TV-MV-GS4M296-S	X		1/4" Male x 1/4" Male

STAINLESS STEEL MINI VALVES FOR LIQUID PROPANE SERVICE

Specifications:

Materials of Construction:

WETTED PARTS: 316 SS

Handle: Anodized Aluminum

Orings: Low Temp Viton

Seat: PCTFE

Pressure Rating:

316SS - 3000 psi @ 200 F

Orifice Size: 0.218"

$C_v = 0.53$



Temp Range:

Low Temp: -65 F to 275 F

High Temp: -15F to 450F

Features

- Stem lifting threads are isolated from process. This prevents contamination and galling
- Non-Rotating Stem provide longer lasting and more positive shut off
- Stem sealing tip is easily replacble
- Designed to be used in 100 C oven
- Designed for severe field service
- Low Temperature Orings

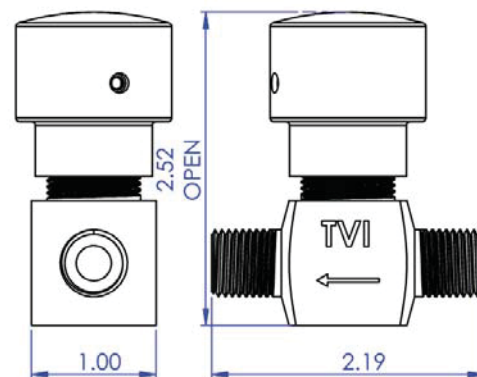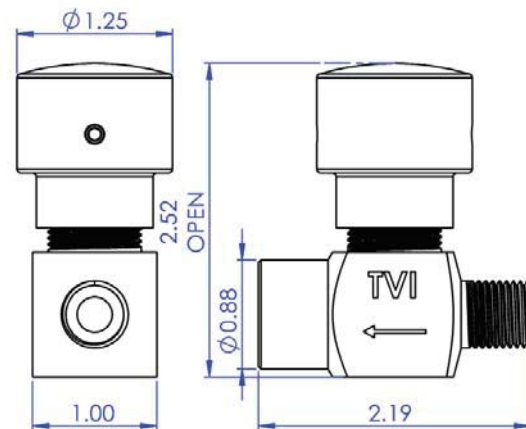

Part Number	316 SS	C.S.	Configuration
TV-NRS-GS4M4F286	X		1/4" Male x 1/4" Female
TV-NRS-GS4M286	X		1/4" Male x 1/4" Male
TV-NRS-GS4M4T286	X		1/4" Male x 1/4" Tube

Valves

Cylinder Valve-Rupture Disc Combo

Characteristics


- Compact Construction
- Incorporated the cylinder valve and rupture disc in a single housing
- Designed to retrofit to most rupture disc bodies
- Features
- Wetted Material: 316L
- O-rings: Viton 75; others available
- Seat: PEEK std.
- Seat: PCTFE available to 3000 psi
- Burst Pressure: See Disc Selection
- 1/4" FNPT Outlet



**SULFINERT
COATING
AVAILABLE**


NOTES:

- Do not use a rupture disc in a location where the sudden release of the material would pose a hazard.
- The burst pressure is identified by a color coated dot on the top of the disc retainer. Do not substitute any other burst disc. A DeTec -TVI disc must be used.
- Make certain there is an isolation valve between the system being sampled and the rupture disc assembly. This is necessary so the system can be closed if the disc bursts.
- Expansion of liquified gases due to small temperature changes may cause a rupture disc to release the cylinder contents. Appropriate regulations and guidelines should be followed to establish safe filling limits.

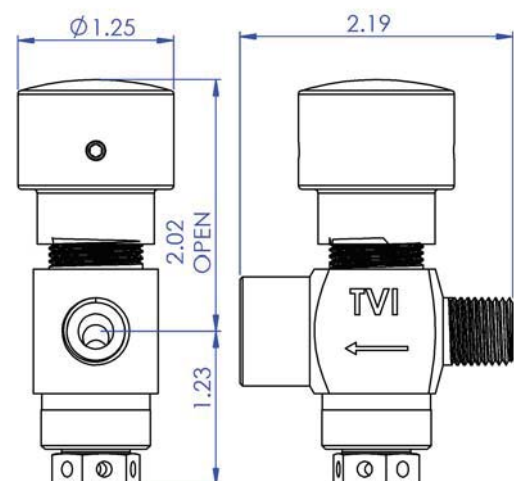

Part Number	RUPTURE DISC
TR-DVS-AMF-1800	1800 PSI
TR-DVS-AMF-3000	3000 PSI

STAINLESS STEEL MINI VALVES FOR LIQUID PROPANE SERVICE WITH BUILT-IN RUPTURE DISC & OUTAGE TUBE

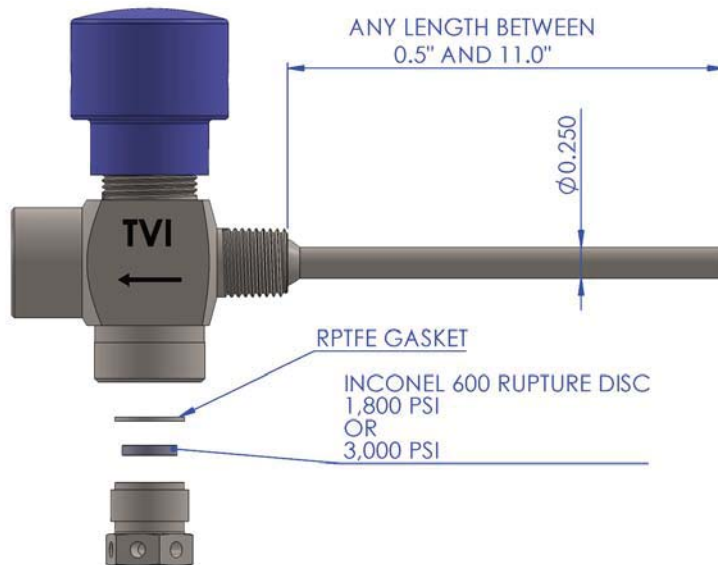

Specifications:

Materials of Construction:

WETTED PARTS: 316 SS

Handle: Anodized Aluminum

Orings: Low Temp Viton

Seat: PCTFE

Pressure Rating:

316SS - 3000 psi @ 200 F


Temp Range:

Low Temp: -65 F to 275 F

High Temp: -15F to 450F

Features

- Stem lifting threads are isolated from process. This prevents contamination and galling
- Non-Rotating Stem provide longer lasting and more positive shut off
- Stem sealing tip is easily replacble
- Designed to be used in 100 C oven
- Designed for severe field service
- Low Temperature Orings
- Low Temperature Lubricants
- 0.218 Orifice
- Built-in Inconel 600 rupture disc

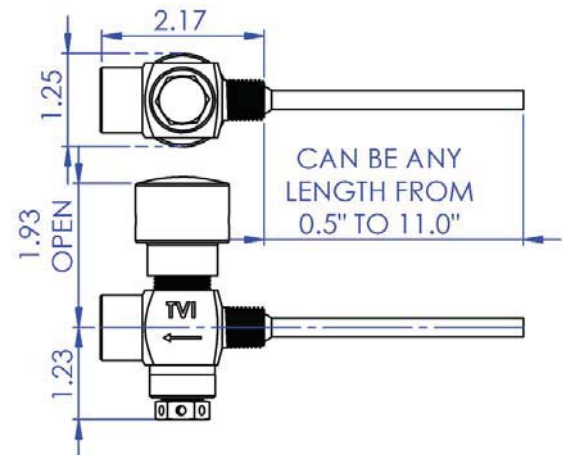

Part Number	RUPTURE DISC	OUTAGE TUBE LENGTH
TR-DVS-MF-OT-1800-X	1800 PSI	X=LENGTH IN INCHES
TR-DVS-MF-OT-3000-X	3000 PSI	X=LENGTH IN INCHES

STAINLESS STEEL MINI VALVES FOR LIQUID PROPANE SERVICE WITH RELIEF VALVE



Specifications:

Materials of Construction:

WETTED PARTS: 316 SS

Handle: Anodized Aluminum

Orings: Low Temp Viton

Seat: PCTFE

Pressure Rating:

316SS - 3000 psi @ 200 F


Temp Range:

Low Temp: -65 F to 275 F

High Temp: -15F to 450F


Features

- Stem lifting threads are isolated from process. This prevents contamination and galling
- Non-Rotating Stem provide longer lasting and more positive shut off
- Stem sealing tip is easily replacble
- Designed to be used in 100 C oven
- Designed for severe field service
- Low Temperature Orings
- Low Temperature Lubricants
- 0.218 Orifice
- Built-in Inconel 600 rupture disc
- Relief valve set at 1,800 psi

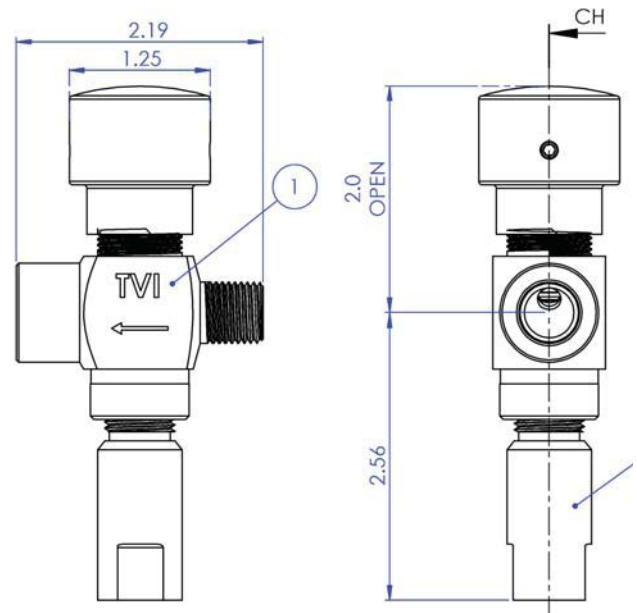

Part Number	SET PRESSURE
TR-RVM-AMF-1800	1800 PSI

STAINLESS STEEL MINI VALVES FOR LIQUID PROPANE SERVICE WITH RELIEF VALVE & OUTAGE TUBE

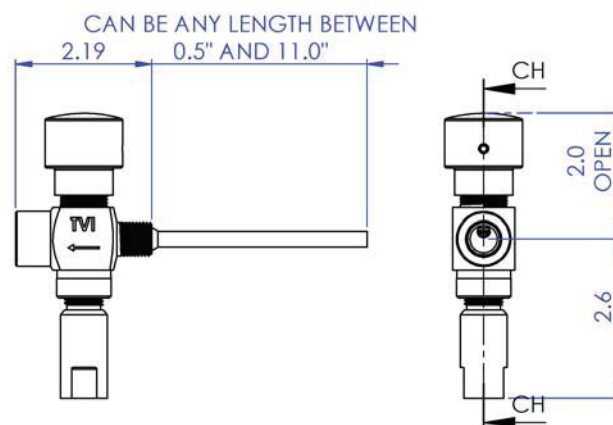

Features

- Stem lifting threads are isolated from process. This prevents contamination and galling
- Non-Rotating Stem provide longer lasting and more positive shut off
- Stem sealing tip is easily replacble
- Designed to be used in 100 C oven
- Designed for severe field service
- Low Temperature Orings
- Low Temperature Lubricants
- 0.218 Orifice
- Built-in Inconel 600 rupture disc
- Relief valve set at 1,800 psi


Specifications:

Materials of Construction:

WETTED PARTS: 316 SS
 Handle: Anodized Aluminum
 Orings: Low Temp Viton
 Seat: PCTFE
 Pressure Rating:
 316SS - 3000 psi @ 200 F
 Temp Range:
 Low Temp: -65 F to 275 F
 High Temp: -15F to 450F

Part Number	SET PRESSURE	OUTAGE TUBE LENGTH
TR-RVM-AMF-OT-1800-X	1800 PSI	X=LENGTH IN INCHES

STAINLESS STEEL MINI VALVES WITH PEEK™ SEATS

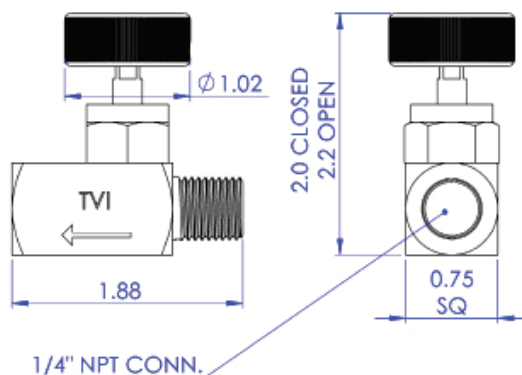

Specifications:

Materials of Construction:

Metal: See Chart Below

Orings: Viton 75 std.

Others available

Orifice Size: 0.138"

$C_v = 0.27$


Seat: PEEK std. Others available

Pressure Rating:

316SS - 6000 psi @ 450 F

C.S. - 6000 psi @ 450 F

Brass - 3000 psi @ 450 F

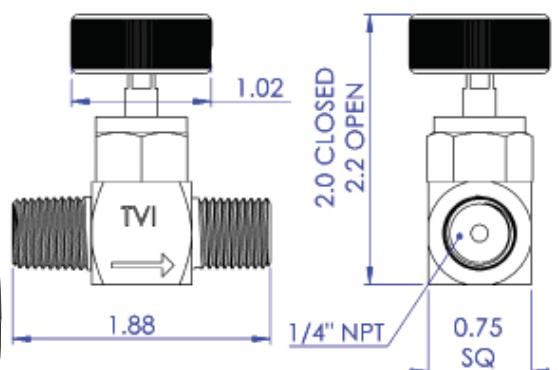

Part Number	316 SS	C.S.	Brass	Monel 400	Configuration
TV-MV-GS4M4F296	X				1/4" Male x 1/4" Female
TV-MV-GS4F296	X				1/4" Female x 1/4" Female
TV-MV-GS4M296	X				1/4" Male x 1/4" Male
TV-MV-GS4M4FA296	X				1/4" Mxf ANGLE
TV-MV-GC4M4F296		X			1/4" Male x 1/4" Female
TV-MV-GC4M296		X			1/4" Male x 1/4" Male
TV-MV-GB4M4F296			X		1/4" Male x 1/4" Female
TV-MV-GB4M296			X		1/4" Male x 1/4" Male
TV-MV-GM4M4F296				X	1/4" Male x 1/4" Female
TV-MV-GM4M296				X	1/4" Male x 1/4" Male

STAINLESS STEEL MINI VALVES WITH PEEK™ SEATS

Specifications:

Materials of Construction:



Metal: See Chart Below

Orings: Viton 75 std.
Others available

Seat: PEEK std. Others available

Pressure Rating:

316SS - 6000 psi @ 450 F
C.S. - 6000 psi @ 450 F
Brass - 3000 psi @ 450 F

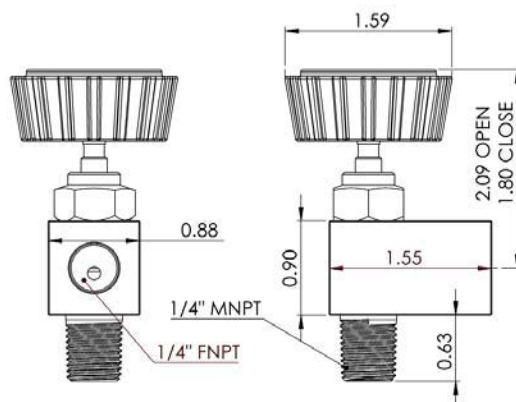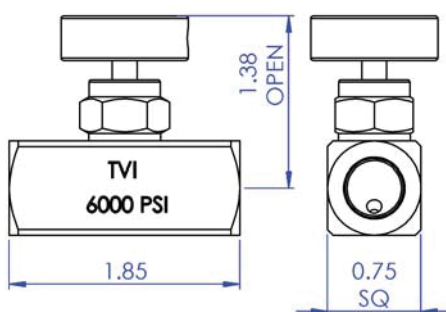

Part Number	316 SS	C.S.	Brass	Monel 400	Configuration
TV-MV-GS4M4F296	X				1/4" Male x 1/4" Female
TV-MV-GS4F296	X				1/4" Female x 1/4" Female
TV-MV-GS4M296	X				1/4" Male x 1/4" Male
TV-MV-GS4M4FA296	X				1/4" Mxf ANGLE
TV-MV-GC4M4F296		X			1/4" Male x 1/4" Female
TV-MV-GC4M296		X			1/4" Male x 1/4" Male
TV-MV-GB4M4F296			X		1/4" Male x 1/4" Female
TV-MV-GB4M296			X		1/4" Male x 1/4" Male
TV-MV-GM4M4F296				X	1/4" Male x 1/4" Female
TV-MV-GM4M296				X	1/4" Male x 1/4" Male

SULFINERT COATING AVAILABLE



Rupture Disc Assy With Outage Tube

Part No. xxx= Outage Code	Minimum Outage (%)				
	10%	20%	30%	40%	50%
OTRD-xxx-150-S	011	015	018	021	025
OTRD-xxx-300-S	017	023	030	037	043
OTRD-xxx-500-S	027	034	045	056	067
OTRD-xxx-1000-S	029	046	060	075	091



Outage Tubes For TVI Cylinders

Part No. xxx= Outage Code	Minimum Outage (%)				
	10%	20%	30%	40%	50%
OT-xxx-150-S	011	015	018	021	025
OT-xxx-300-S	017	023	030	037	043
OT-xxx-500-S	027	034	045	056	067
OT-xxx-1000-S	029	046	060	075	091

All Outage Tubes are 316 SS Construction

Characteristics

- Compact Construction
- Designed to be mounted in line between a cylinder and a mini valve


Features

- Body Material: 316L
- Retainer Material: 316L
- RPTFE GASKET
- Rupture Disc Material: Alloy 600


Dimensions:

Rupture Disc Assembly


Part No. TR-RDT-A

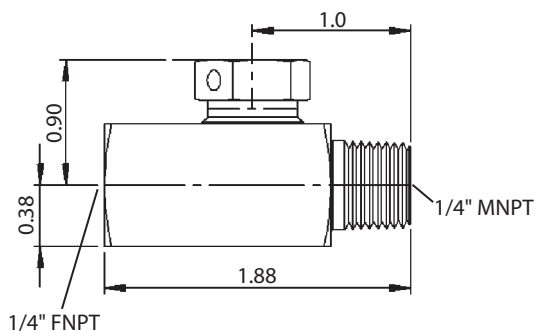

Burst Disc Configurations*



RD-1750-44-A600



RD-1750-56-A600

Part No.	Burst Pressure	Diameter
TR-RD-1750-44-A600	1800 psi	0.44
TR-RD-1750-56-A600	1800 psi	0.56
TR-RD-2950-44-A600	3000 psi	0.44
TR-RD-2950-56-A600	3000 psi	0.56
TR-RD-5000-44-A600	5000 psi	0.44
TR-RD-5000-56-A600	5000 psi	0.56



NOTES:

- Do not use a rupture disc in a location where the sudden release of the material would pose a hazard.
- The burst pressure is identified by a color coded dot on the top of the disc retainer. Do not substitute any other burst disc. A DeTec disc must be used.
- Make certain there is an isolation valve between the system being sampled and the rupture disc assembly. This is necessary so the system can be closed if the disc bursts.
- Expansion of liquified gases due to small temperature changes may cause a rupture disc to release the cylinder contents. Appropriate regulations and guidelines should be followed to

* FLAT RETAINER RING IS STANDARD

FITS MOST RUPTURE DISC HOLDER OF THE SAME DIAMETER

Can be used with a Teflon Gasket

SULFINERT COATING AVAILABLE

Characteristics


- Compact Construction
- Designed to be mounted in line between a cylinder and a mini valve
- Designed to retrofit to most rupture disc bodies
- Features
- Body Material: 316L
- Retainer Material: 316L
- Seat: Viton 75
- Spring : S.S.
- Set Point: Adjustable - 1500 psi to 2500 psi
- 1/4" FNPT Outlet

Inline Mounting

Part Numbers:

TR-RVA-A-MXF

1/4" FNPT Male x Female

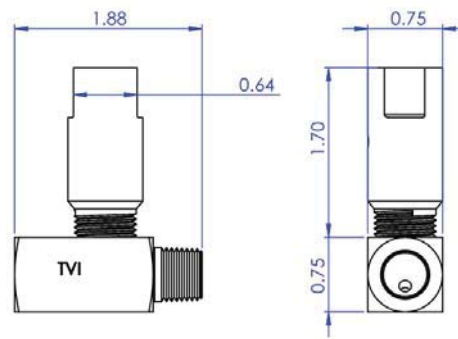

NOTES:

- Do not use a relief valve in a location where the sudden release of the material would pose a hazard.
- Make certain there is an isolation valve between the system being sampled and the relief valve assembly. This is necessary so the system can be closed if the disc bursts.
- Expansion of liquified gases due to small temperature changes may cause a pressure relief valve to release the partial cylinder contents. Appropriate regulations and guidelines should be followed to establish safe filling limits.



Part No. TR-RV-A


5/8"-18 UNF-2A

Connection

Fits Most Holders

SULFINERT COATING AVAILABLE

CONSTANT PRESSURE SAMPLE CYLINDER


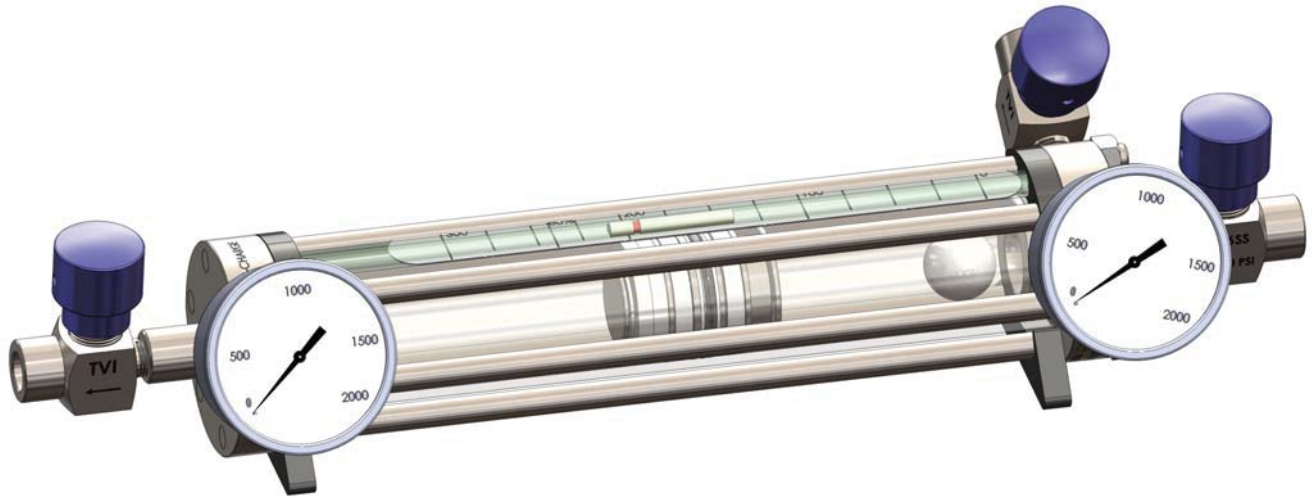


Designed as DOT 3E with Special Permit #
SP-20245

FEATURES

- ELECTRO POLISHED CYLINDER BORE
- NON-HYDRO CARBON LUBRICANT
- VERY LOW FRICTION FOR LOW PRESSURE APPLICATIONS
- PEEK® SEATS ON NEEDLE VALVES FOR LONG LIFE
- EASY CLEAN UP
- GAUGES CAN BE SIZED TO THE APPLICATION
- CYLINDER RATED FOR 1800 PSI
- EASY TO READ MAGNETIC SCALE
- TEFLON MIXING BALL MEANS NO DENTS OR SCRATCHES TO CYLINDER BORE
- SPECIAL VORTEX MIXER AVAILABLE FOR HIGH GRAVITY FLUIDS
- RATED FOR 300 F
- SULFINERT™ WETTED PARTS ARE AVAILABLE

300 cc Size
SHOWN

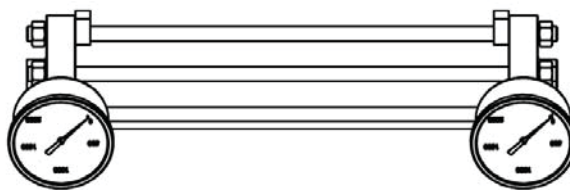

Specifications	
Wetted Metal	316 SS
Elastomers	Viton; 90A Molythane
Tie Rods & Nuts	304 SS
Mixing Ball	PTFE
RUPTURE DISC	INCONEL 600
Pressure Rating of Cylinder	1800 PSi @ 200F
Valve Seats	Delrin
Valve Seals	Viton 75
Temperature Rating	300F

Dimensions & Weights		
Size	Overall Length	Weight
300 cc	13.6"	12.3 lbs
500 cc	20.5"	13.0 lbs
1000 cc	34.9"	19.0 lbs

TC-CP [] [] [] [] []

Size ———

3 = 300cc
5 = 500cc
10 = 1000cc

Cylinder Gauges ———

1 = 300 psi
2 = 600 psi
3 = 1000 psi
4 = 2000 psi

Metal Wetted Parts ———

1 = 316 SS
S = Sulfinerted™


316 SS ———

Elastomers ———

V = Viton/Peek
K = Kalrez/PCTFE
E = EPDM/Peek
B = Buna/Peek

Mixer ———

S = PTFE Ball
V = Vortex Mixer

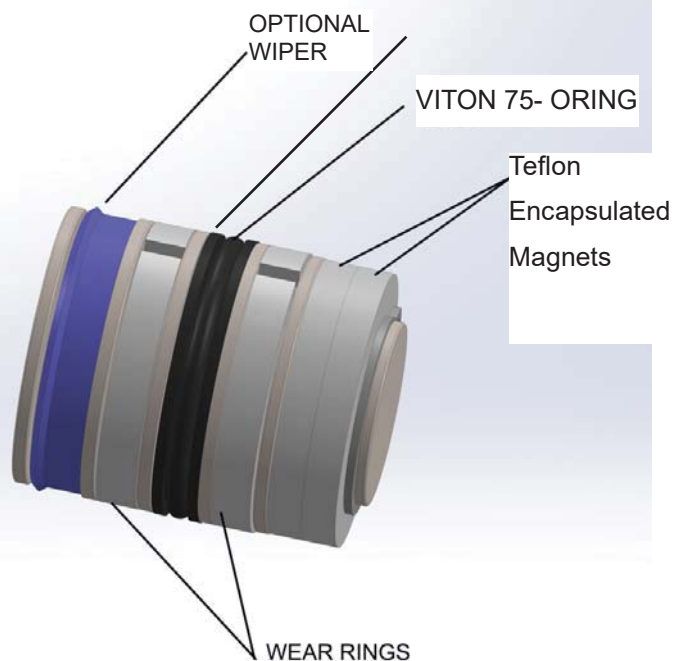


Piston Features

- Wear Rings - Prevent metal to metal contact between the piston and cylinder
- Teflon Encapsulated Magnets - Prevent rust and corrosion from building up on the magnets

CP CYLINDER WITH ASSIST MECHANISM

Designed as DOT 3E with Special Permit #
SP-20245

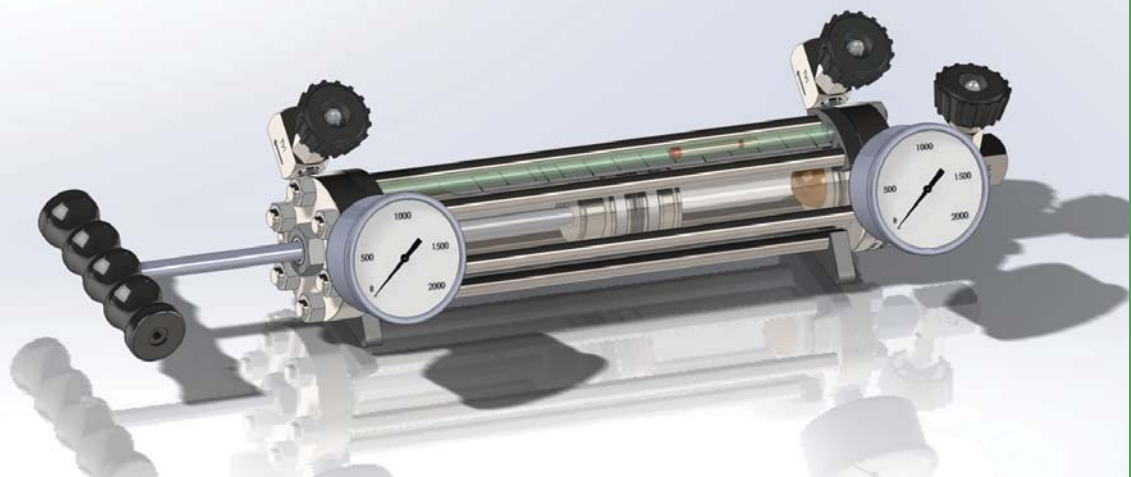

Purpose:



The assist handle model is designed for low pressure application where the process pressure is not sufficient to drive the piston rearward while collecting a sample. Our piston will typically move with at least 25 psi of differential pressure. If the application involves a lower pressure or the process characteristics are such that they can foul the piston, then the assist handle can be used to overcome the forces of “stickation”.

The assist handle is not recommended for high pressure applications.

FEATURES

- ELECTRO POLISHED CYLINDER BORE
- NON-HYDRO CARBON LUBRICANT
- VERY LOW FRICTION FOR LOW PRESSURE APPLICATIONS
- PEEK® SEATS ON NEEDLE VALVES FOR LONG LIFE
- EASY CLEAN UP
- GAUGES CAN BE SIZED TO THE APPLICATION
- CYLINDER RATED FOR 1800 PSI
- EASY TO READ MAGNETIC SCALE
- TEFLON MIXING BALL MEANS NO DENTS OR SCRATCHES TO CYLINDER BORE
- SPECIAL VORTEX MIXER AVAILABLE FOR HIGH GRAVITY FLUIDS
- RATED FOR 300 F
- SULFINERT™ WETTED PARTS ARE AVAILABLE
- CAN BE USED TO DRAW PROCESS SAMPLES FROM VACUUM TO 25 PSI.
- SAMPLE PRESSURES ABOVE 25 PSI SHOULD RELY ON PRE CHARGE GAS PRESSURE

500 cc Size
SHOWN

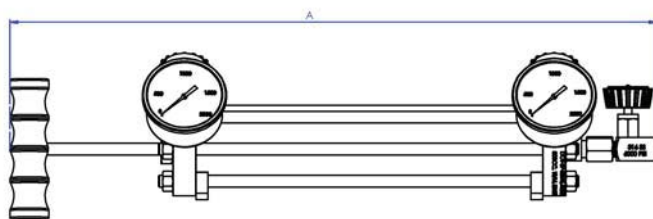

Specifications	
Wetted Metal	316 SS
Elastomers	Viton; 90A Molythane
Tie Rods & Nuts	304 SS
Mixing Ball	PTFE
RUPTURE DISC	INCONEL 600
Pressure Rating of Cylinder	1800 PSi @ 200F
Valve Seats	Delrin
Valve Seals	Viton 75
Temperature Rating	300F

Dimensions & Weight			
Size	Overall Length - Closed- inches	Overall Length - Open- inches	Weight- Pounds
300 cc	17.3	25.3	12.3
500 cc	21.8	29.8	13.0
1000 cc	38.3	46.3	19.0

TC-CPA


Size
 3 = 300cc
 5 = 500cc
 10 = 1000cc

Cylinder Gauges
 1 = 300 psi
 2 = 600 psi
 3 = 1000 psi
 4 = 2000 psi

Metal Wetted Parts
 1 = 316 SS
 S = Sulfinerted™
 316 SS

Elastomers
 V = Viton/Peek
 K = Kalrez/PCTFE
 E = EPDM/Peek
 B = Buna/Peek

Mixer
 S = PTFE Ball
 V = Vortex Mixer

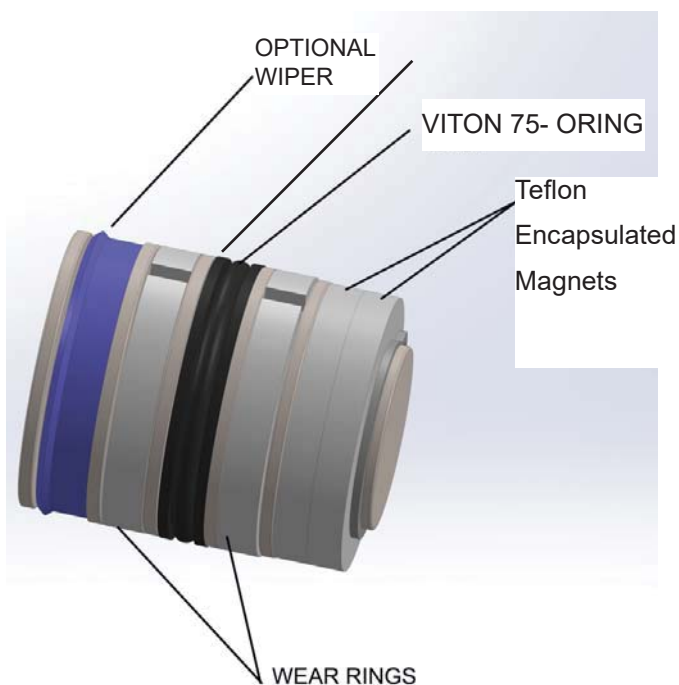

Piston Features

- Wear Rings - Prevent metal to metal contact between the piston and cylinder
- Teflon Encapsulated Magnets - Prevent rust and corrosion from building up on the magnets

SAMPLE CYLINDER QUICK CONNECTS




FEATURES:

- Quick and easy operation
- Couples without tools
- When coupled the valve opens automatically
- When uncoupled the valve closes automatically
- Single end (SE) stems are open while separated from the body
- Double-end (DE) stems are shut off while separated from the body

OPERATION:

- Coupling: After aligning the stem and body, push the stem into the body
- Uncoupling: Pull the body sleeve toward the stem and remove the stem from the body
- Coupling and uncoupling should be done at room temperature
- Periodically relube stem seal orings.

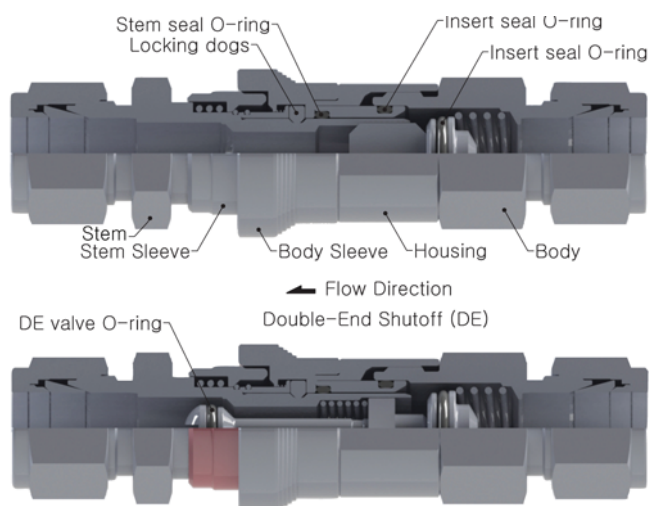

Materials of Construction

Component	Material
Body, Body Insert, Body Sleeve Housing, Stem, and Valve	316L
DE Stem	316L-Urethane coated
SE Stem	316L
O-rings	FKM, FFKM, EPDM, NBR
Locking Dogs	Stainless Steel
Springs	Stainless Steel
Snap Rings	Stainless Steel

Pressure - Temperature Chart

Material	316L	
Series	TVIQC4	TVIQC6
Temperature F (C)	Pressure Psig (Bar)	
Quick Connects - Coupled		
70 (20)	3000 (206)	1800 (103)
250 (121)	1850 (127)	970 (96.8)
300 (148)	1400 (96.4)	750 (51.6)
400 (204)	500 (34.4)	400 (27.5)
500 (34.4)	150 (10.3)	150 (10.3)
Quick Connects - Uncoupled or Open		
70 (20)	250 (17.2)	


O-ring Materials & Temperature Range

Designator	Material	Temperature Range
VT	FKM	10F(-23C) to 400F (204C)
KA	FFKM	60F (15C) to 500F (260C)
EP	EPDM	-50F (-45C) to 300F (148C)
NBR	NBR	0 F (-17C) to 250 F (121C)


Spillage, Air Inclusion & Maximum Flow Rate @ 70F (20C)

Series	Spillage cm ³	Air Inclusion cm ³	Flow -H ₂ O- L/Min
TVIQC4	0.3	0.3	15
TVIQC6	1.0	1.0	22


SAMPLE CYLINDER QUICK CONNECTS



Fitting Size	Part Number		SERIES	Flow Coefficient (Cv)			Dimensions		
	SE	DE		SE	DE	Full Flow	"L" in inches		"F" in inches
							SE	DE	
1/4"	TQC4-S-4PM	TQC4-D-4PM	4	0.3	.02	.04	2.22	2.28	5/8




Fitting Size	Part Number		SERIES	Flow Coefficient (Cv)			Dimensions		
	SE	DE		SE	DE	Full Flow	"L" in inches		"F" in inches
							SE	DE	
1/4"	TQC4-S-4PF	TQC4-D-4PF	4	0.3	.02	.04	2.26	2.32	3/4

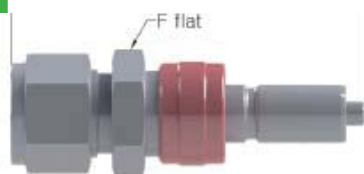

Fitting Size	Part Number		SERIES	Flow Coefficient (Cv)			Dimensions		
	SE	DE		SE	DE	Full Flow	"L" in inches		"F" in inches
							SE	DE	
1/4"	TQC4-S-400	TQC4-D-400	4	0.3	.02	.04	2.36	2.42	3/4



Fitting Size	PART NUMBER	Series	Dimensions	
			"L" in inches	"D" in inches
1/4"	TQC4-B-4PM	4	2.16	0.91

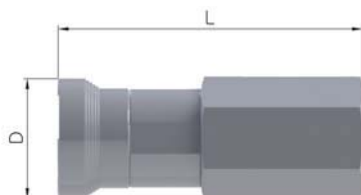


Fitting Size	PART NUMBER	Series	Dimensions	
			"L" in inches	"D" in inches
1/4"	TQC4-B-4PF	4	2.42	0.91




Fitting Size	PART NUMBER	Series	Dimensions	
			"L" in inches	"D" in inches
1/4"	TQC4-B-400	4	2.30	0.91

SAMPLE CYLINDER QUICK CONNECTS



Fitting Size	PART NUMBER	Series	Dimensions	
			"L" in inches	"D" in inches
1/4"	TQC4-S1-400	4	2.67	0.91




Fitting Size	PART NUMBER	Series	Dimensions	
			"L" in inches	"D" in inches
1/4"	TQC4-B1-400	4	2.74	0.91



STEM
PROTECTOR


PROTECTORS		
Series	Stem protector	Body Protector
4	TQC4-SP	TQC4-BP



BODY
PROTECTOR

Features:

- Permeation resistant PTFE hose
- Smooth PTFE core
- 316 SS overbraid - standard
- Wide chemical compatibility
- Custom assemblies available
- Options: Tagging

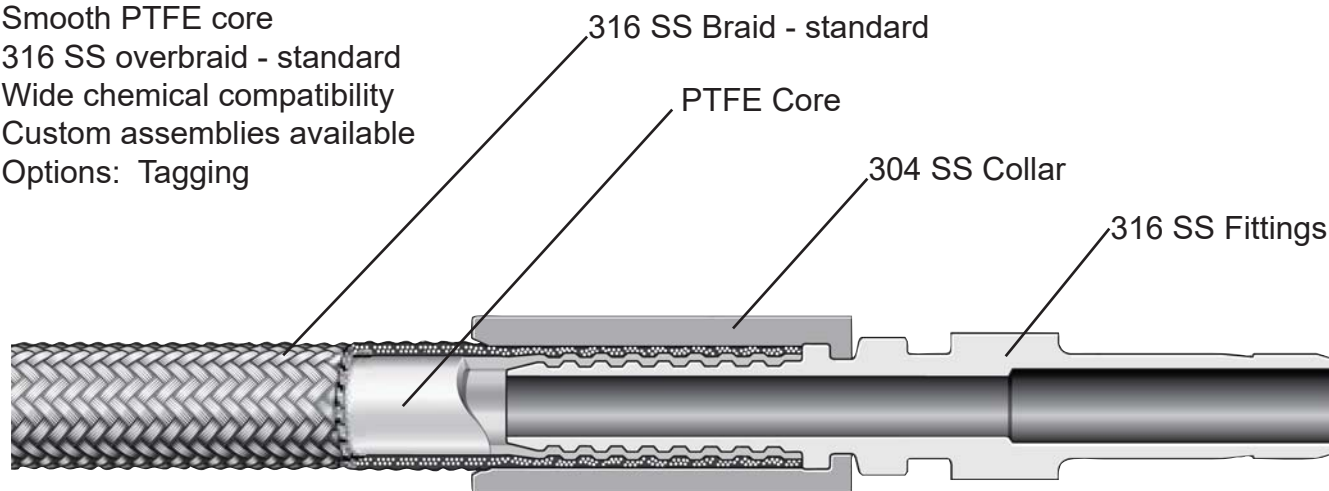**Working Parameters**

Hose Size in(mm)	Inside Diameter in(mm)	Outside Diameter in(mm)	Min. Bend Radius in (cm)		Temp Range F (C)	Vacuum (28.5"Hg) Temp Rate F (C)	Working Press. @ 70 F(C)	Min. Burst Press. @ 70 F(C)	Hose Weight lb/ft(kg/m)
			Static	Dynamic					
1/4(6.4)	0.19(4.8)	0.31(7.9)	1.5(3.81)	2.00(5.08)	-65 to 450 (-53 to 230)	450(230)	3000(206)	12000(826)	0.08(0.12)
3/8(9.5)	0.31(7.9)	0.44(11.1)	3.50(8.89)	5.00(12.7)		450(230)	2500(172)	10000(689)	0.12(0.17)
1/2(12.7)	0.41(10.3)	0.56(14.3)	4.50(11.4)	6.00(15.2)		450(230)	2000(137)	8000(551)	0.15(0.22)

Temperature - Pressure Constraints


Hose Size	1/4"	3/8"	1/2"
Temperature F (C)	Working Pressure Limit - psig(bar)		
-65(-53)	2250(155)	2250(155)	2000(137)
09(17) to 100(37)	3000(206)	2500(172)	2000(137)
200(93) to 450(230)	2250(155)	1875(129)	1500(103)

Testing

All hose assemblies are tested to 1.5x working pressure for 60 seconds. No pressure drop allowed.

Packaging

All hose assemblies are cleaned and individually bagged and boxed.

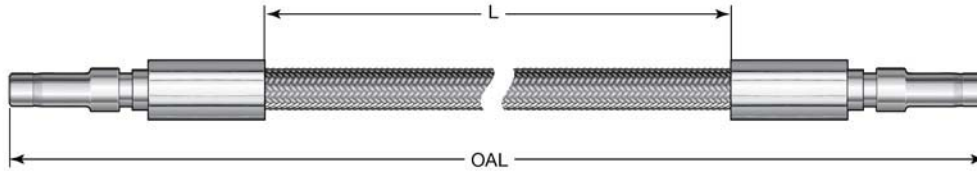Tube Stub End Assemblies

Hose Size	Tube Stub Size	Overall Length OAL	Part Number	Dimensions		
				Live Length L	End connection Inside Diameter	Major Diameter
Inches		in (mm)		in (mm)	in (mm)	in (mm)
1/4"	1/4"	8.00 (203)	TH-__-__-4-6-__	3.92 (100)	0.13 (3.3)	0.49 (12.4)
		14.0 (356)	TH-__-__-4-12-__	9.92 (252)		
		20.0 (508)	TH-__-__-4-18-__	15.9 (404)		
		26.0 (660)	TH-__-__-4-24-__	21.9 (556)		
		38.0 (965)	TH-__-__-4-36-__	33.9 (861)		
		50.0 (1270)	TH-__-__-4-48-__	45.9 (1170)		
		62.0 (1570)	TH-__-__-4-60-__	57.9 (1470)		
		74.0 (1880)	TH-__-__-4-72-__	69.9 (1780)		
		122 (3100)	TH-__-__-4-120-__	118 (3000)		
3/8"	3/8"	14.0 (356)	TH-__-__-6-12-__	9.64 (245)	0.23 (5.8)	0.59 (15.0)
		20.0 (508)	TH-__-__-6-18-__	15.6 (396)		
		26.0 (660)	TH-__-__-6-24-__	21.6 (549)		
		38.0 (965)	TH-__-__-6-36-__	33.6 (853)		
		50.0 (1270)	TH-__-__-6-48-__	45.6 (1160)		
		62.0 (1570)	TH-__-__-6-60-__	57.6 (1460)		
		74.0 (1880)	TH-__-__-6-72-__	69.6 (1770)		
1/2"	1/2"	14.5 (36.8)	TH-__-__-8-12-__	9.04 (230)	0.34 (8.6)	0.78 (19.8)
		20.5 (521)	TH-__-__-8-18-__	15.0 (381)		
		26.5 (673)	TH-__-__-8-24-__	21.0 (53.3)		
		38.5 (97.8)	TH-__-__-8-36-__	33.0 (838)		
		50.5 (1280)	TH-__-__-8-48-__	45.0 (1140)		
		62.5 (1590)	TH-__-__-8-60-__	57.0 (1450)		
		74.5 (1890)	TH-__-__-8-72-__	69.0 (1750)		
		122.5 (3110)	TH-__-__-8-120-__	117 (2970)		



**TUBE STUB
END**

**Tube Fitting
End**



**Female Pipe
End**



**Male Pipe
End**

Ordering Tree

TH-S44-S44-6-24-X-X

TH = Teflon Hose

First Tube End Connections

S44 = 1/4" Tube Stub End - Size 4 Hose
 S66 = 3/8" Tube Stub End - Size 6 Hose
 S88 = 1/2" Tube Stub End - Size 8 Hose
 S68 = 3/8" Tube Stub End - Size 8 Hose
 T24 = 1/8" Tube Fitting- Size 4 Hose Only
 T44 = 1/4" Tube Fitting- Size 4 Hose Only
 T66 = 3/8" Tube Fitting- Size 6 Hose Only
 T88 = 1/2" Tube Fitting- Size 8 Hose Only
 M44 = 1/4" mnpt Fitting - Size 4 Hose
 M46 = 1/4" mnpt Fitting - Size 6 Hose
 M48 = 1/4" mnpt Fitting - Size 8 Hose
 F44 = 1/4" fnpt Fitting - Size 4 Hose
 F46 = 1/4" fnpt Fitting - Size 6 Hose
 M66 = 3/8" mnpt Fitting - Size 6 Hose
 M68 = 3/8" mnpt Fitting - Size 8 Hose
 F66 = 3/8" fnpt Fitting - Size 6 Hose Only
 M88 = 1/2" mnpt Fitting- Size 8 Only
 F88 = 1/2" fnpt Fitting - Size 8 Only

First Tube End Connections

S44 = 1/4" Tube Stub End - Size 4 Hose
 S66 = 3/8" Tube Stub End - Size 6 Hose
 S88 = 1/2" Tube Stub End - Size 8 Hose
 S68 = 3/8" Tube Stub End - Size 8 Hose
 T24 = 1/8" Tube Fitting- Size 4 Hose Only
 T44 = 1/4" Tube Fitting- Size 4 Hose Only
 T66 = 3/8" Tube Fitting- Size 6 Hose Only
 T88 = 1/2" Tube Fitting- Size 8 Hose Only
 M44 = 1/4" mnpt Fitting - Size 4 Hose
 M46 = 1/4" mnpt Fitting - Size 6 Hose
 M48 = 1/4" mnpt Fitting - Size 8 Hose
 F44 = 1/4" fnpt Fitting - Size 4 Hose
 F46 = 1/4" fnpt Fitting - Size 6 Hose
 M66 = 3/8" mnpt Fitting - Size 6 Hose
 M68 = 3/8" mnpt Fitting - Size 8 Hose
 F66 = 3/8" fnpt Fitting - Size 6 Hose Only
 M88 = 1/2" mnpt Fitting- Size 8 Only
 F88 = 1/2" fnpt Fitting - Size 8 Only

Hose Size

4 = Nominal 1/4"
 6 = Nominal 3/8"
 8 = Nominal 1/2"

Nominal Over All
 Length in Inches

8
 12
 18
 24
 36
 48
 60
 72
 120
 Call for any other length

Options:

X = None
 N = Nitrogen Purge
 L = lanyard Tag
 L2 = Two Lanyard Tags
 C = Clamp Tag

Specials:

X = None

Texas Valve & Instrument, LLC
 8221 Lockheed Ave
 Houston, TX 77061

T 713.645.2100
 F 713.645.2102
 E sales@tvi-i.com
 website www.tvi-i.com

RV, RL, AND RM SERIES

Relief valves open when system pressure and set pressure of the valve matches. This allows the pressurized medium to flow out until the PRV reaches its reset point. The opening height of the stem and the system pressure are directly proportional. However, the actual amount in units per second that the valve can pass is limited by the size of the valve orifice. Therefore, attention should be paid to sizing the valve to the system.

Features:

- Set Pressure
 - RV series: 7 color coded springs for a wide range of set pressures
50 to 6,000 psig @ 70 F (3.4 to 414 bar @ 20 C)
 - RL series: 10 to 225 psig @ 70 F (0.68 to 15.5 bar @ 20 C)
 - RM series: 3 color coded springs for a wide range of set pressures
50 to 1500 psig @ 70 F (3.4 to 103 bar @ 20 C)
- Maximum outlet pressure:
 - RV series: 1500 psig (103 bar)
 - RL series: 225 psig (15.5 bar)
 - RM series: 50 to 1500 psig (103 bar)
- Orifice Size:
 - RV series: 0.14" (3.8mm)
 - RL series: 0.19" (4.8mm) and 0.25" (6.4mm)
 - RM series: 0.25" (6.4mm)
- Back pressure and Pre-set pressure
 - RV and RM series: Balanced stem design eliminates back pressure issue
 - RL series: Pre-set pressure = Desired pressure - 0.8 x back pressure
- Working temperature: -10 F to 300 F (-23 C to 148 C)
- Multiple end connections
- Liquid, vapor, or gas service
- Easily adjustable set pressure
- Holes drilled for lock wire
- Multiple seal materials available
- Manual pressure test handle available

Temperature Range of Soft Goods

O-ring Material	Temp Range F (C)
Fluorocarbon FKM	25 to 250 (-4 to 121)
Buna-N	0 to 250 (-17 to 121)
Neoprene	-10 to 300 (-23 to 148)
EPD	30 to 250 (-1 to 121)
Perfluorocarbon FFKM	-6 to 482 (-21 to 250)



Ordering Tree

TRV - 4 - MXF - SS - 6 - V - P - Y - N

Series

TRV TRM TRL

Inlet Size

2 = 1/8" 8 = 1/2"

4 = 1/4" 12 = 3/4"

6 = 3/8"

Inlet/Outlet Type

MXF = Male Pipe Inlet x Female Pipe Outlet

FT = Fractional Tubing Inlet X Fraction Tubing Outlet

FTF= Fractional Tubing Inlet X Female Pipe Outlet

Body Material

SS = 316SS

XX = other materials

Orifice Size

6 = 0.14" (3.6mm) RV only

7 = 0.19" (4.8mm)

8 = 0.25" (6.4mm) RL & RM

Seal Material

B = Buna N

N = Neoprene

V = Viton FKM

K = Kalrez FFKM

E = Ethylene Propylene

Spring Kit

G = Green - 50 - 300 psig (for RV & RM)

O = Orange - 300-700 psig (for RV & RM)

Y = Yellow - 300-700 psig (for RL only)

- 700-1500 psig (RV & RM)

P = Purple - 1500-2500 psig (RV only)

W = White - 2500-3500 psig (RV only)

B = Blue - 3500-4500 psig (RV only)

R = Red - 4500-6000 psig (RV only)

Locking Wire & Seal

N = No

Y = Yes



Manual Override Handle

N = No

Y = Yes

RV Series Dimensions



Item #	Part Name	Material Type
1	Body	316SS/A182
2	Insert	316SS/A179
3	O-ring	FKM
4	Seat Retainer	316SS/A479
5	O-ring	FKM
6	Stem	316SS/A479
7	O-ring	FKM
8	Seat Retainer	PTFE
9	Bonnet	316SS/A479
10	Spring Support	316SS/A276
11	Lock Nut	17-4PH -PM
12	Spring	S17700SS/AMS 5678
13	Label	Polyester
14	Bonnect Cap	316SS/A479

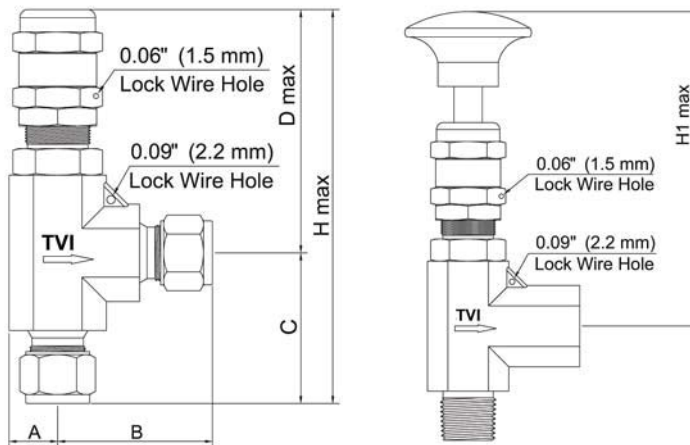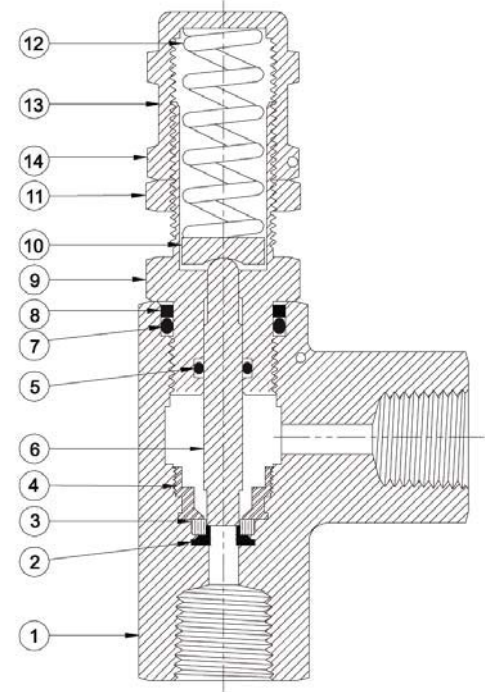

Pattern #	Connection		Orifice in(mm)	Dimensions - in(mm)					
	Inlet	Outlet		A	B	C	Dmax	Hmax	H1max
TRV-4-FXP	1/4" MNPT	1/4" FNPT	0.14" (3.6)	0.43 (10.9)	1.17 (29.7)	1.38 (34.9)	2.70 (68.6)	4.08 (103.5)	4.28 (108.7)
TRV-4-FY	1/4" Tube	1/4" Tube		0.43 (10.9)	1.60 (40.6)	1.44 (36.6)	2.70 (68.6)	4.14 (105.2)	4.09 (103.9)
TRV-8-FT	1/2" Tube	1/2" Tube		0.50 (12.7)	1.83 (46.5)	1.83 (46.5)	4.09 (103.9)	5.92 (150)	5.37 (136.4)
TRV-4-FTL	1/4" Tube	1/4" FNPT		0.43 (10.9)	1.60 (40.6)	1.19 (30.2)	2.70 (68.6)	3.89 (98.8)	4.09 (104)

RL Series Dimensions




Item #	Part Name	Material Type
1	Body	316SS/A182
2	Gasket (#7 only)	316SS/A479
3	Seat	316SS/A479
4	Bonded Disc	316SS/A479-FKM coated
5	Stem	316SS/A479
6	Retainer (#7 Only)	316SS/A479
6a	Ring (#8 only)	316SS/S479
7	Quad Seat	FKKM
8	O-ring	FKM
9	Bonnet	316SS/A279
10	Spring Support	316SS/A576
11	Spring	S17700SS/AMS 5678
12	Lock Nut	17-4 PH-PM
13	Sleeve	304SS/A240
14	Label	Polyester
15	Bonnet Cap	316SS/A479

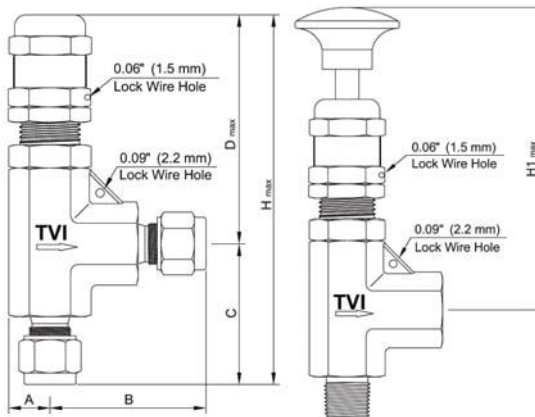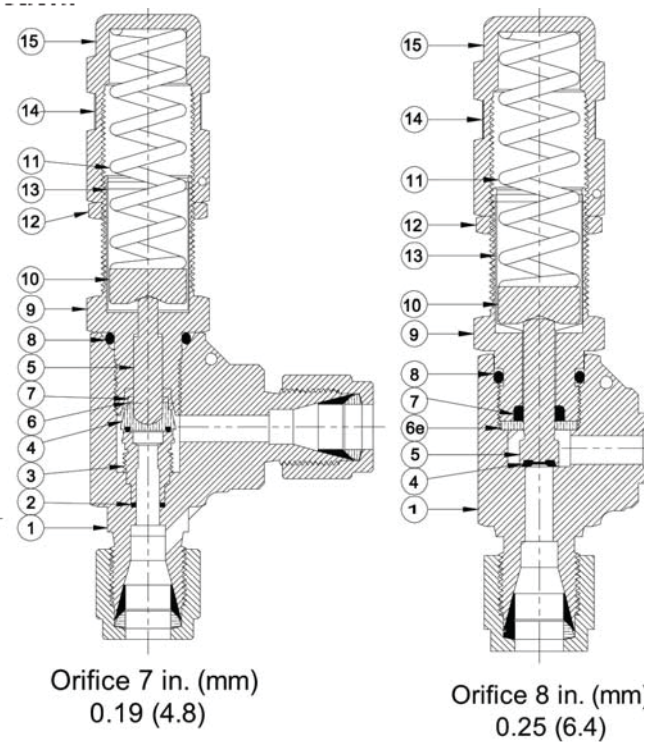

Pattern #	Connection		Orifice in(mm)	Dimensions - in(mm)					
	Inlet	Outlet		A	B	C	Dmax	Hmax	H1max
TRL-4-FXP	1/4" MNPT	1/4" FNPT	0.19 (4.8)	0.43 (10.9)	1.17 (29.7)	1.19 (30.2)	2.70 (68.6)	3.89 (98.8)	4.28 (108.7)
TRL-8-FXP	1/2" MNPT	1/2" FNPT	0.25 (6.4)	0.5 (12.7)	1.44 (36.6)	1.44 (36.6)	4.09 (104)	5.52 (140)	5.37 (136)
TRL-4-FT	1/4" Tube	1/4" Tube	0.19 (4.8)	0.43 (10.9)	1.60 (40.6)	1.55 (36.6)	2.70 (68.6)	4.14 (105)	4.09 (103.9)
TRL-8-FT	1/2" Tube	1/2" Tube	0.25 (6.4)	0.50 (12.7)	1.83 (46.5)	1.83 (46.5)	4.09 (103.9)	5.92 (150)	5.37 (136.4)
TRL-4-FTF	1/4" Tube	1/4" FNPT	0.19 (4.8)	0.43 (10.9)	1.17 (29.7)	1.19 (30.2)	2.70 (68.6)	3.89 (98.8)	4.09 (104)

RM Series Dimensions

Item #	Part Name	Material Type
1	Body	316SS/A182
2	Stem	316SS/A479-FKM coated
3	Retainer	316SS/A479
4	Seal	FKM
5	Bonnet	316SS/A479
6	O-ring	FKM
7	Spring Support	316SS/A276
8	Spring	S17700SS/AMS 5678
9	Lock Nut	17-4PH-PM
10	Label	Polyester
11	Bonnet Cap	316SS/A576

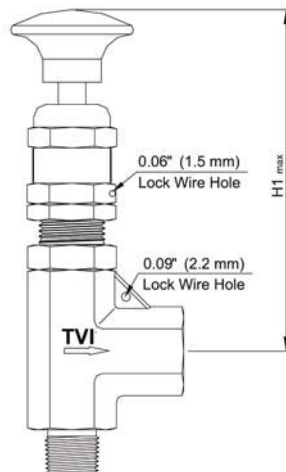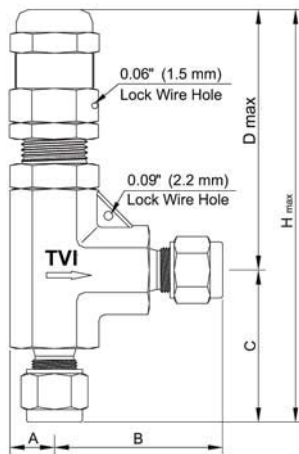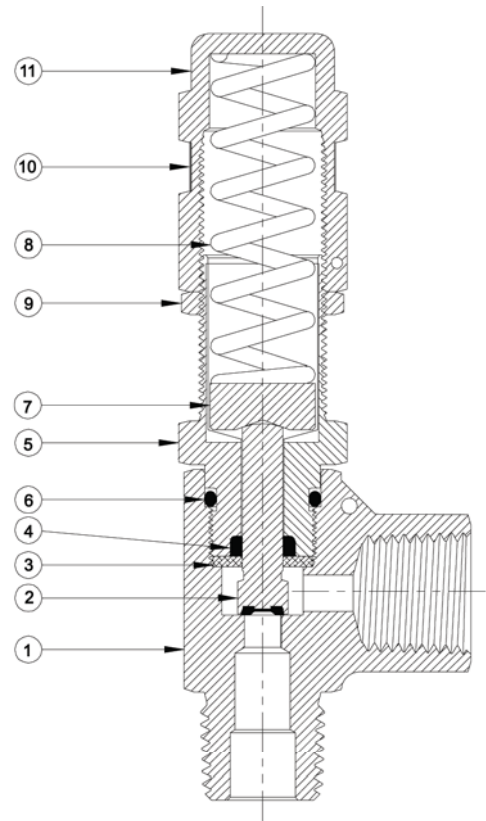


Pattern #	Connection		Orifice in(mm)	Dimensions - in(mm)					
	Inlet	Outlet		A	B	C	Dmax	Hmax	H1max
TRM-8-FXP	1/2" MNPT	1/2" FNPT	0.25 (6.4)	0.5 (12.7)	1.17 (29.7)	1.19 (30.2)	4.09 (104)	3.89 (98.8)	5.37 (136)
TRM-8-FT	1/2" Tube	1/2" Tube	0.25 (6.4)	0.50 (12.7)	1.83 (46.5)	1.83 (46.5)	4.09 (103.9)	5.52 (140)	5.37 (136.4)


TVI Sampling Systems

TRL Flow Data @ 70 F (20 C)







Air

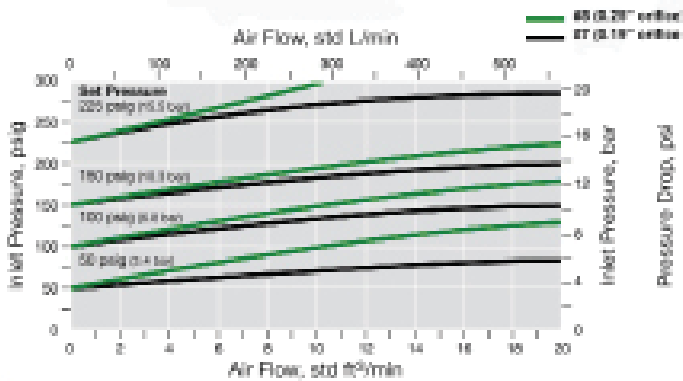

Water

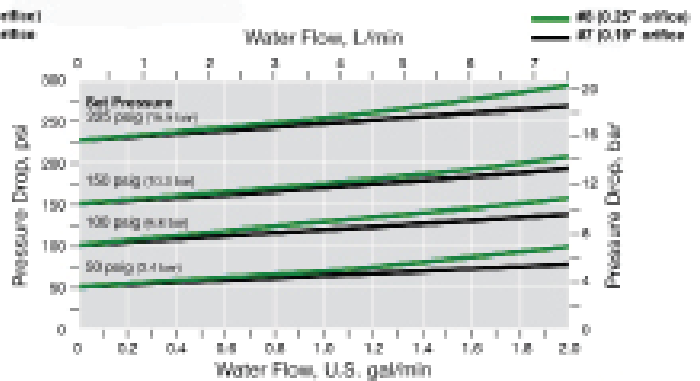

TRV & TRM Flow Data @ 70 F (20 C)

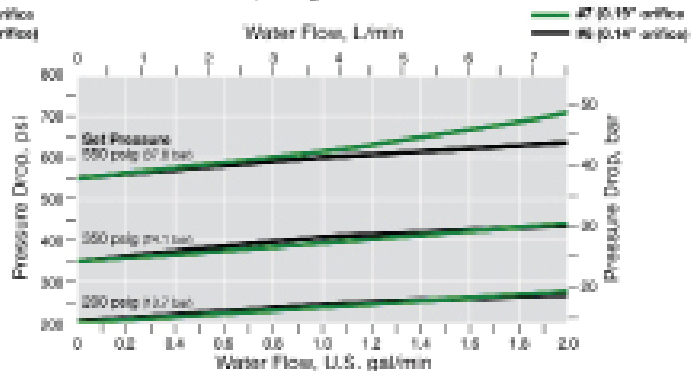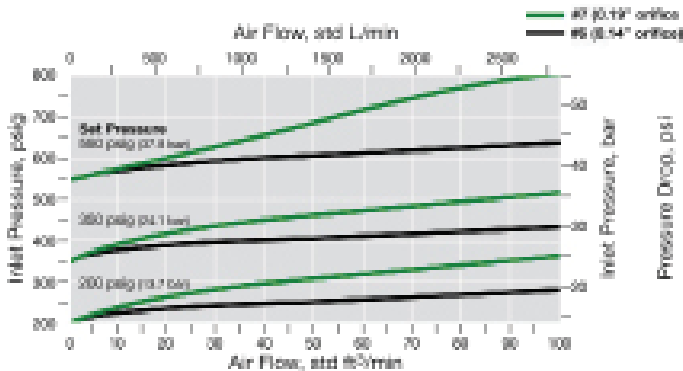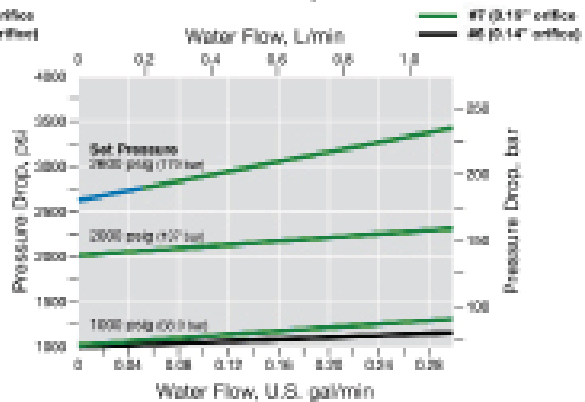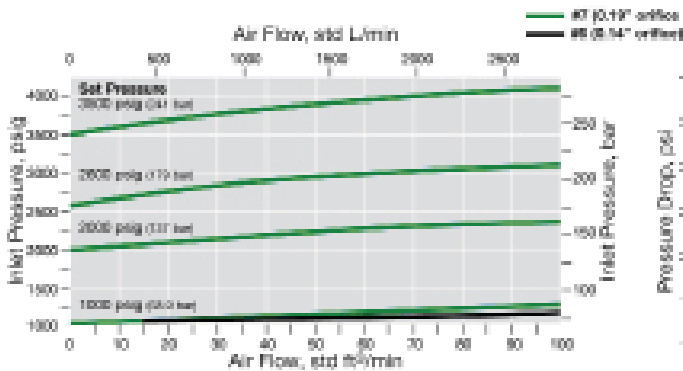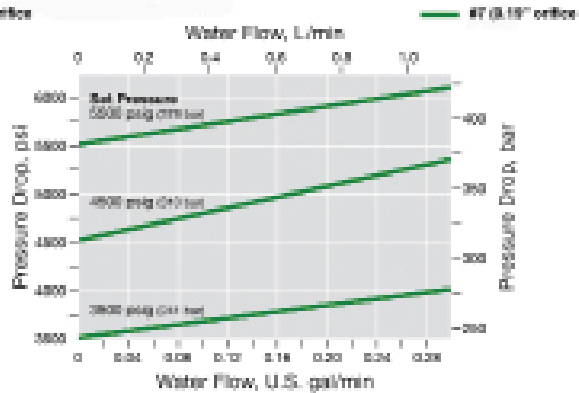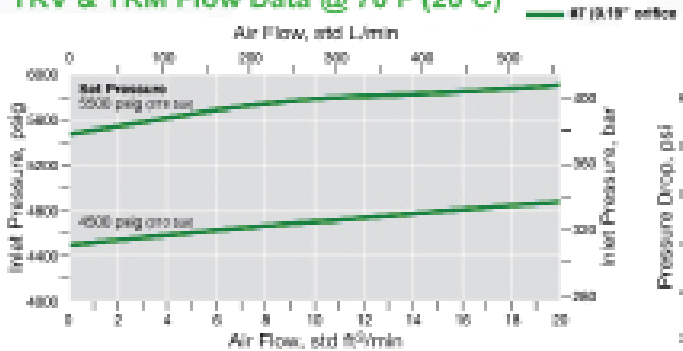




Shown with 300cc Cylinder



Includes handle and two clamps
Material: 304SS

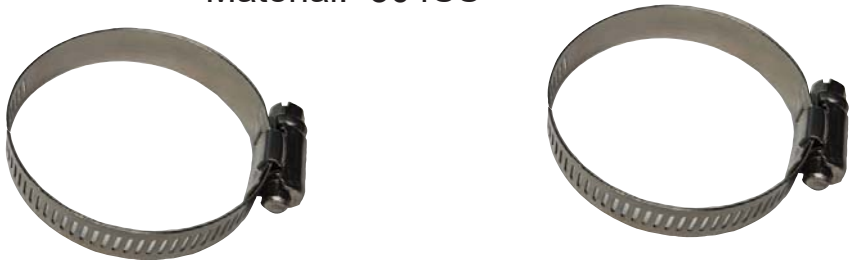

Part Number	Configuration
TS-SSC-CY-2	FITS ALL 2" CYLINDERS: 150, 300, 400, AND 500CC
TS-SSC-CY-4	FITS ALL 3.50-4.00" CYLINDERS: 1000CC, 2250CC, AND 1 GALLON